

MI - 70	MAMC0000490	CI74ET	Induction Ranges

ITEM

2 zone induction top




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



MI - 70	MAMC0000490	CI74ET	Induction Ranges
RANGE	CODE	MODEL	FUNCTION

ITEM

2 zone induction top

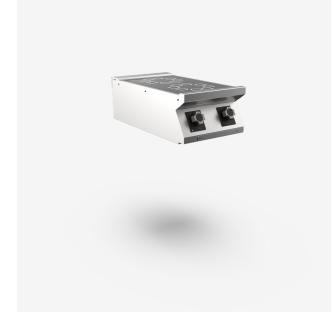

TECHNICAL SPECIFICATIONS						
WIDTH (mm):	400					
DEPTH (mm):	750					
HEIGHT (mm):	250					
WEIGHT (Kg):	27					
VOLUME (m ³):	0.2					
EL. POWER (kW):	10					
VOLTAGE:	VAC400-3N					
COOKING ZONES N°:	2					
COOKING ZONES DIM. (mm):	2x Ø 230mm					
IP GRADE:	IPX5					

DESCRIPTION

Induction boiling top in AISI 3O4 stainless steel. 20/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 2 independent cooking zones, each with underlying 5 kW Ø 230 mm round inductors. Pan detection system that activates heating when cooking receptacle is present. The cooking zones are identified by screen printed markings and equipped with residual heat indicators. IO-position energy selector for heat control with shape designed to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Integral power-box complete with main safety sensor. IPX5 water-resistant rating.




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: **29/4/2024**



MI - 70	MAMC0000490	CI74ET	Induction Ranges
RANGE	CODE	MODEL	FUNCTION

ITEM

2 zone induction top

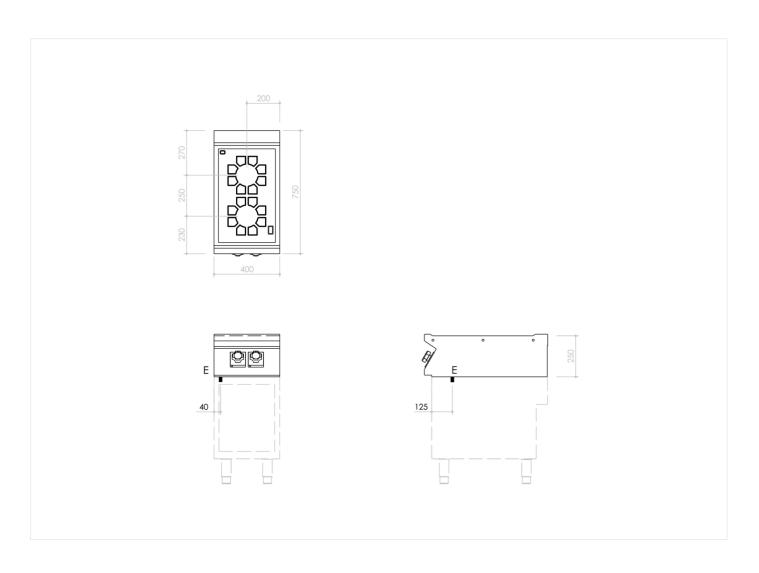

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC400-3N 50/60Hz



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: **29/4/2024**