

RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACRO000380	TRT2PTNCP	Refrigerated Counters MI

ITEM

Refrigerated counter MI 2 doors -2+8°C with top and without backsplash



RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACRO000380	TRT2PTNCP	Refrigerated Counters MI

ITEM

Refrigerated counter MI 2 doors -2/+8°C with top and without backplash



TECHNICAL SPECIFICATIONS

RANGE:	-2/+8°C	
WIDTH (mm):	1355	
DEPTH (mm):	700	
HEIGHT (mm):	890	
WEIGHT (Kg):	165	
VOLUME (m ³):	1.03	
EL. POWER (kW):	0.25	
VOLTAGE:	VAC230	
FREQUENCY (Hz):	50Hz	
INTERNAL DIM. (mm):	791x530x580(h) mm	
EXTERNAL MATERIAL:	304	
INTERNAL MATERIAL:	304	
GROSS CAPACITY (L):	243	
OPERATING MODE:	Ventilated	
DOORS:	2 Doors	
STANDARD EQUIPMENT:	1 Plastic-coated grid GNI/I for each door.	
DEFROST TYPE:	Hot gas	
REFRIGERANT POWER:	425	
ENERGY CLASS:	A	GAS TYPE: R290 / 3
REFRIGERANT QUANTITY (g):	80	
NOISE LEVEL:	51	
ENERGY PER YEAR:	570	
CLIMATE CLASS:	5 +40°C 40%	

DESCRIPTION


Single-shell structure H=710mm. in stainless steel AISI 304. With top. External scotch-brite satin finish. 60mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc). External back plate in galvanized steel, as option in stainless steel AISI 304 scotch-brite. Feet in stainless steel adjustable in height H 140/230mm. Cell with rounded corners for a more effective internal cleaning. Self-closing doors with safety stop at 95°. Easily removable door and drawers magnetic gaskets. Monobloc refrigerating unit. Ducted ventilation system on the back for a perfect and homogeneous internal temperature. Hot gas defrost and automatic evaporation of condensation water. Ergonomic handles. Both versions available on request with the technical compartment on the left. Standard power supply 230V/50H. Upper and lower door hinges fixed frontally to the frame (replaceable with no need to remove the worktop). Reversible doors. Equipped with 2 set of runners + 2 GN I/I plastic-coated steel grid. Refrigerant gas R290. Energy Efficiency class A (570 kWh/year)



RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACRO000380	TRT2PTNCP	Refrigerated Counters MI

ITEM

Refrigerated counter MI 2 doors -2+8°C with top and without backsplash

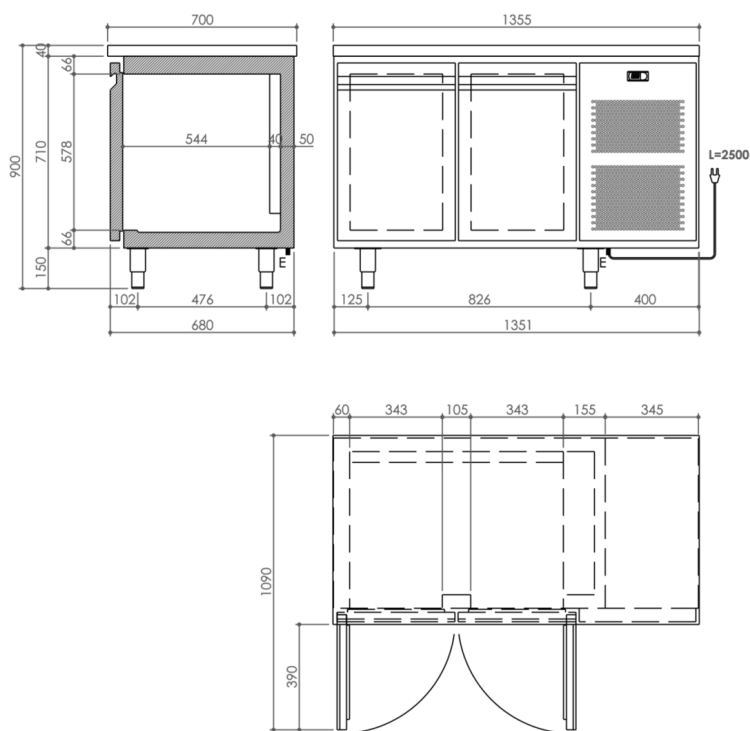

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC230 50Hz

Type of electrical plug:

with Schuko plug and cable

