

| RANGE | CODE | MODEL | FUNCTION |
|-----------------------|-------------|-----------|--------------------------|
| Refrigerated Counters | MACROOOO390 | TRT2PTNPA | Refrigerated Counters MI |

ITEM

Refrigerated counter MI 2 doors -2+8°C with top and backsplash



| RANGE | CODE | MODEL | FUNCTION |
|-----------------------|-------------|-----------|--------------------------|
| Refrigerated Counters | MACRO000390 | TRT2PTNPA | Refrigerated Counters MI |

ITEM

Refrigerated counter MI 2 doors -2/+8°C with top and backplash



TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--|
| RANGE: | -2/+8°C |
| WIDTH (mm): | 1355 |
| DEPTH (mm): | 700 |
| HEIGHT (mm): | 890 |
| WEIGHT (Kg): | 168 |
| VOLUME (m ³): | 1.03 |
| EL. POWER (kW): | 0.25 |
| VOLTAGE: | VAC230 |
| FREQUENCY (Hz): | 50Hz |
| INTERNAL DIM. (mm): | 791x530x580(h) mm |
| EXTERNAL MATERIAL: | 304 |
| INTERNAL MATERIAL: | 304 |
| GROSS CAPACITY (L): | 243 |
| OPERATING MODE: | Ventilated |
| DOORS: | 2 Doors |
| STANDARD EQUIPMENT: | 1 Plastic-coated grid GNI/I for each door. |
| DEFROST TYPE: | Hot gas |
| REFRIGERANT POWER: | 425 |
| ENERGY CLASS: A | GAS TYPE: R290 / 3 |
| REFRIGERANT QUANTITY (g): | 80 |
| NOISE LEVEL: | 51 |
| ENERGY PER YEAR: | 570 |
| CLIMATE CLASS: | 5 +40°C 40% |

DESCRIPTION


Single-shell structure H=710mm, in stainless steel AISI 304. With top with squared edge and upstand. External scotch-brite satin finish. 60mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc). External back plate in galvanized steel, as option in stainless steel AISI 304 scotch-brite. Feet in stainless steel adjustable in height H 140/230mm. Cell with rounded corners for a more effective internal cleaning. Self-closing doors with safety stop at 95°. Easily removable door and drawers magnetic gaskets. Monobloc refrigerating unit. Ducted ventilation system on the back for a perfect and homogeneous internal temperature. Hot gas defrost and automatic evaporation of condensation water. Ergonomic handles. Both versions available on request with the technical compartment on the left. Standard power supply 230V/50Hz. Upper and lower door hinges fixed frontally to the frame (replaceable with no need to remove the worktop). Reversible doors. Equipped with 2 set of runners + 2 GN I/I plastic-coated steel grid. Refrigerant gas R290. Energy Efficiency class A (570 kWh/year)



| RANGE | CODE | MODEL | FUNCTION |
|-----------------------|-------------|-----------|--------------------------|
| Refrigerated Counters | MACROOOO390 | TRT2PTNPA | Refrigerated Counters MI |

ITEM

Refrigerated counter MI 2 doors -2+8°C with top and backsplash

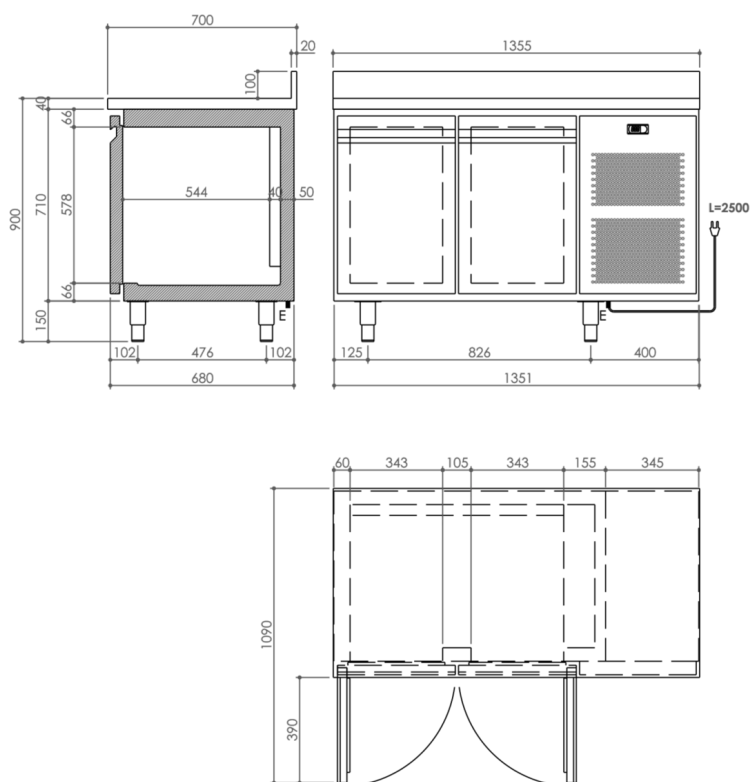

INSTALLATION SPECIFICATIONS

| | |
|----------------------------|----------------------------|
| (E) Electrical Connection: | VAC230 50Hz |
| Type of electrical plug: | with Schuko plug and cable |

