

RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACROOOO48I	TRT3PBTPA	Refrigerated Counters MI

ITEM

Refrigerated counter MI 3 doors -10-20°C with top and backsplash



RANGE CODE MODEL FUNCTION
Refrigerated Counters **MACROOOO48I** **TRT3PBTPA** **Refrigerated Counters MI**

ITEM

Refrigerated counter MI 3 doors -10-20°C with top and backsplash



TECHNICAL SPECIFICATIONS

RANGE:	-20/-10°C
WIDTH (mm):	1805
DEPTH (mm):	700
HEIGHT (mm):	890
WEIGHT (Kg):	209
VOLUME (m ³):	1.44
EL. POWER (kW):	0.87
VOLTAGE:	VAC230
FREQUENCY (Hz):	50Hz
INTERNAL DIM. (mm):	1239x530x580(h) mm
EXTERNAL MATERIAL:	304
INTERNAL MATERIAL:	304
GROSS CAPACITY (L):	381
OPERATING MODE:	Ventilated
DOORS:	3 Doors
STANDARD EQUIPMENT:	1 Plastic-coated grid GNI/I for each door.
DEFROST TYPE:	Hot gas
REFRIGERANT POWER:	600
ENERGY CLASS: D	GAS TYPE: R290 / 3
REFRIGERANT QUANTITY (g):	120
NOISE LEVEL:	59
ENERGY PER YEAR:	3077
CLIMATE CLASS:	5 + 40°C 40%

DESCRIPTION


Single-shell structure H=710mm, in stainless steel AISI 304. With top with squared edge and upstand. External scotch-brite satin finish. 60mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc). External back plate in galvanized steel, as option in stainless steel AISI 304 scotch-brite. Feet in stainless steel adjustable in height H 140/230mm. Cell with rounded corners for a more effective internal cleaning. Self-closing doors with safety stop at 95°. Easily removable door and drawers magnetic gaskets. Monobloc refrigerating unit. Ducted ventilation system on the back for a perfect and homogeneous internal temperature. Hot gas defrost and automatic evaporation of condensation water. Ergonomic handles. Both versions available on request with the technical compartment on the left. Standard power supply 230V/50H. Upper and lower door hinges fixed frontally to the frame (replaceable with no need to remove the worktop). Reversible doors. Equipped with 3 set of runners + 3 GN I/I plastic-coated steel grid. Refrigerant gas R290. Energy Efficiency class D (3077 kWh/year)



RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACROOOO48I	TRT3PBTPA	Refrigerated Counters MI

ITEM

Refrigerated counter MI 3 doors -10-20°C with top and backsplash

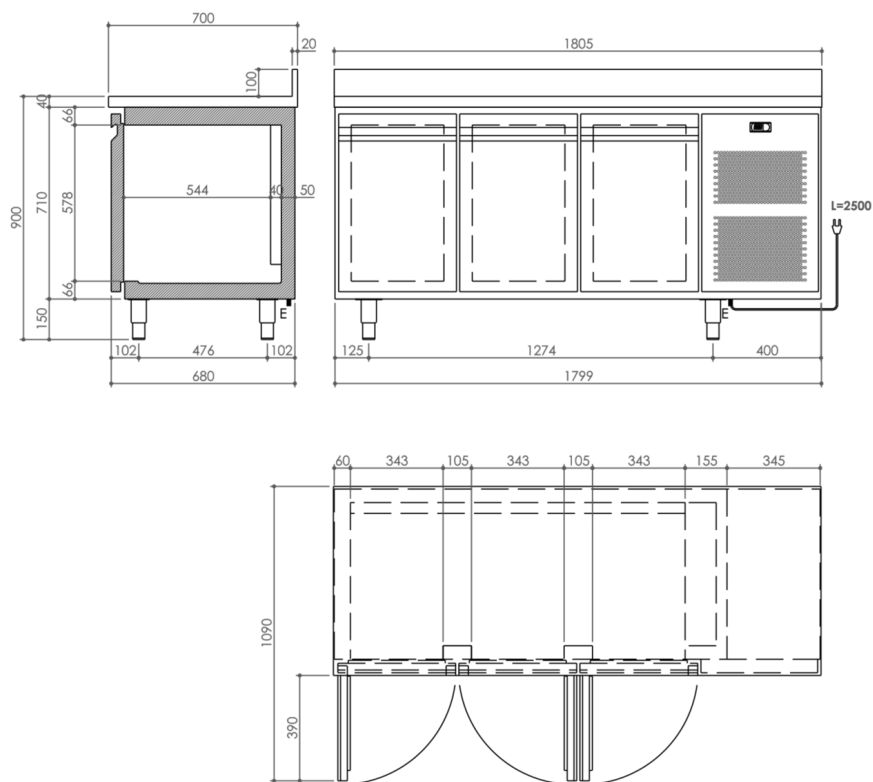

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **VAC230 50Hz**
 Type of electrical plug: **with Schuko plug and cable**

