



RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACRO000120	TRE3PTNCP	Refrigerated Counters MO

## ITEM

## Refrigerated counter MO 3 doors 0/+10°C with top and without backsplash



## TECHNICAL SPECIFICATIONS

RANGE:	0/+10°C	
WIDTH (mm):	1805	
DEPTH (mm):	700	
HEIGHT (mm):	850	
WEIGHT (Kg):	192	
VOLUME (m <sup>3</sup> ):	1.22	
EL. POWER (kW):	0.235	
VOLTAGE:	VAC230	
FREQUENCY (Hz):	50Hz	
INTERNAL DIM. (mm):	1239x530x540(h) mm	
EXTERNAL MATERIAL:	304	
INTERNAL MATERIAL:	304	
GROSS CAPACITY (L):	355	
OPERATING MODE:	Ventilated	
DOORS:	3 Doors	
STANDARD EQUIPMENT:	1 Plastic-coated grid GNI/I for each door.	
DEFROST TYPE:	Hot gas	
REFRIGERANT POWER:	380	
ENERGY CLASS: <b>B</b>	GAS TYPE:	<b>R290 / 3</b>
REFRIGERANT QUANTITY (g):	80	
NOISE LEVEL:	51	
ENERGY PER YEAR:	827	
CLIMATE CLASS:	5 +40°C 40%	

## DESCRIPTION


Single-shell structure H=670mm. in stainless steel AISI 304. With top. External scotch-brite satin finish. 50mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc). External back plate in galvanized steel, as option in stainless steel AISI 304 scotch-brite. Feet in stainless steel adjustable in height H 140/230mm. Cell with rounded corners for a more effective internal cleaning. Self-closing doors with safety stop at 95°. Easily removable door and drawers magnetic gaskets. Monobloc refrigerating unit. Automatic defrost and automatic evaporation of condensation water. Ergonomic handles. Standard power supply 230V/50Hz. Equipped with 3 GN I/I plastic-coated steel grids. Refrigerant gas R290. Energy Efficiency class B (827 kWh/year)



RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACRO000120	TRE3PTNCP	Refrigerated Counters MO

ITEM

Refrigerated counter MO 3 doors O+10°C with top and without backsplash

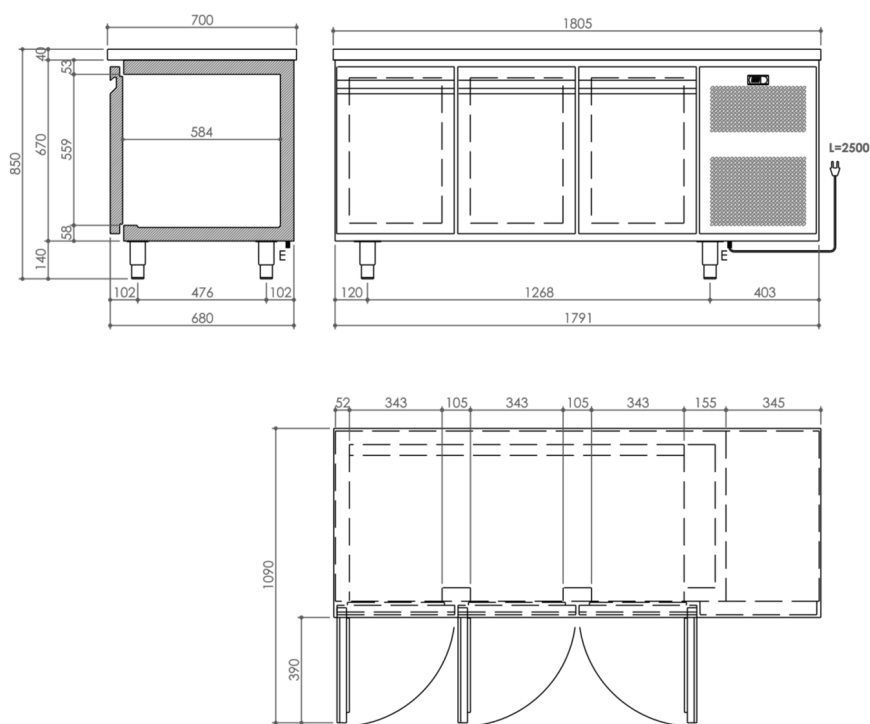

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection:

VAC230 50Hz

Type of electrical plug:

with Schuko plug and cable

