

RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACRO0000620	TRT2PPTNCP	Refrigerated Counters MI - Fitted for Remote Unit

ITEM

Refrigerated counter MI 2 doors -2+8°C fitted for remote unit, with top and without backsplash



RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACROOOO620	TRT2PPTNCP	Refrigerated Counters MI - Fitted for Remote Unit

ITEM

**Refrigerated counter MI 2 doors -2/+8°C fitted for remote unit, with top and without backsplash**



**TECHNICAL SPECIFICATIONS**

RANGE:	<b>-2/+8°C</b>
WIDTH (mm):	<b>1145</b>
DEPTH (mm):	<b>700</b>
HEIGHT (mm):	<b>890</b>
WEIGHT (Kg):	<b>130</b>
VOLUME (m <sup>3</sup> ):	<b>0.87</b>
EL. POWER (kW):	<b>0.1</b>
VOLTAGE:	<b>VAC230</b>
FREQUENCY (Hz):	<b>50Hz</b>
INTERNAL DIM. (mm):	<b>791x530x580(h) mm</b>
EXTERNAL MATERIAL:	<b>304</b>
INTERNAL MATERIAL:	<b>304</b>
GROSS CAPACITY (L):	<b>243</b>
OPERATING MODE:	<b>Ventilated</b>
DOORS:	<b>2 Doors</b>
STANDARD EQUIPMENT:	<b>1 Plastic-coated grid GNI/I for each door.</b>
DEFROST TYPE:	<b>Electric</b>
REFRIGERANT POWER:	<b>550</b>
GAS TYPE:	<b>R134a</b>
CLIMATE CLASS:	<b>5 +40°C 40%</b>

**DESCRIPTION**


Refrigerated counter -2 +8°C with valve fitting for remote refrigeration unit. single-shell structure in stainless steel AISI 304. With top. External scotch-brite satin finish. 60mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc). External back plate in galvanized steel, as option in stainless steel AISI 304 scotch-brite. Feet in stainless steel adjustable in height H 140/230mm. Cell with rounded corners for a more effective internal cleaning. Self-closing doors with safety stop at 95°. Easily removable door and drawers magnetic gaskets. Ducted ventilation system on the back for a perfect and homogeneous internal temperature. Electric defrosting and automatic evaporation of condensation water. Ergonomic handles. On request with the technical compartment on the left. Standard power supply 220-240V 50/60Hz. Cooling gas R134a. Upper and lower door hinges fixed frontally to the frame (replaceable with no need to remove the worktop). Reversible doors. Equipped with 2 set of runners + 2 GN I/I plastic-coated steel grid.



RANGE	CODE	MODEL	FUNCTION
Refrigerated Counters	MACROOOO620	TRT2PPTNCP	Refrigerated Counters MI - Fitted for Remote Unit

ITEM

Refrigerated counter MI 2 doors -2+8°C fitted for remote unit, with top and without backsplash

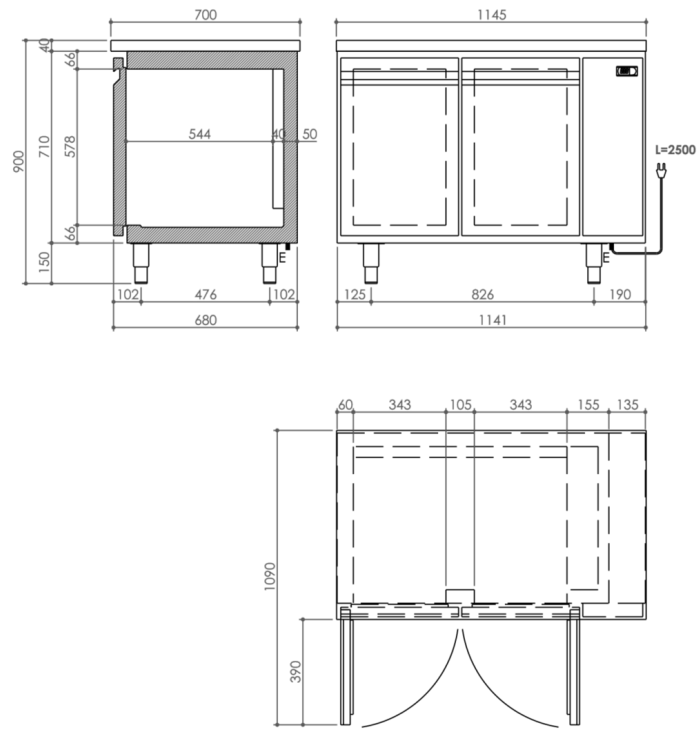

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection:	VAC230 50Hz
Type of electrical plug:	with Schuko plug and cable

