

| RANGE                    | CODE        | MODEL      | FUNCTION   |
|--------------------------|-------------|------------|--|
| Refrigerated<br>Counters | MACROOOO630 | TRT2PPTNPA | Refrigerated Counters MI -<br>Fitted for Remote Unit |

ITEM

Refrigerated counter MI 2 doors -2+8°C fitted for remote unit, with top and backsplash



| RANGE                 | CODE        | MODEL      | FUNCTION  |
|-----------------------|-------------|------------|---|
| Refrigerated Counters | MACRO000630 | TRT2PPTNPA | Refrigerated Counters MI - Fitted for Remote Unit |

ITEM

Refrigerated counter MI 2 doors -2+8°C fitted for remote unit, with top and backplash



TECHNICAL SPECIFICATIONS

|                           |  |
|---------------------------|--|
| RANGE:                    | -2/+8°C                                    |
| WIDTH (mm):               | 1145                                       |
| DEPTH (mm):               | 700  |
| HEIGHT (mm):              | 890  |
| WEIGHT (Kg):              | 133  |
| VOLUME (m <sup>3</sup> ): | 0.87                                       |
| EL. POWER (kW):           | 0.1  |
| VOLTAGE:                  | VAC230                                     |
| FREQUENCY (Hz):           | 50Hz                                       |
| INTERNAL DIM. (mm):       | 791x530x580(h) mm                          |
| EXTERNAL MATERIAL:        | 304  |
| INTERNAL MATERIAL:        | 304  |
| GROSS CAPACITY (L):       | 243  |
| OPERATING MODE:           | Ventilated                                 |
| DOORS:                    | 2 Doors                                    |
| STANDARD EQUIPMENT:       | 1 Plastic-coated grid GNI/I for each door. |
| DEFROST TYPE:             | Electric                                   |
| REFRIGERANT POWER:        | 550  |
| GAS TYPE:                 | R134a                                      |
| CLIMATE CLASS:            | 5 + 40°C 40%                               |

DESCRIPTION


Refrigerated counter -2 +8°C with valve fitting for remote refrigeration unit. single-shell structure in stainless steel AISI 304. With top with squared edge and upstand. External scotch-brite satin finish. 60mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc). External back plate in galvanized steel, as option in stainless steel AISI 304 scotch-brite. Feet in stainless steel adjuscounter in height H 140/230mm. Cell with rounded corners for a more effective internal cleaning. Self-closing doors with safety stop at 95°. Easily removable door and drawers magnetic gaskets. Ducted ventilation system on the back for a perfect and homogeneous internal temperature. Electric defrosting and automatic evaporation of condensation water. Ergonomic handles. On request with the technical compartment on the left. Standard power supply 220-240V 50/60Hz. Cooling gas R134a. Upper and lower door hinges fixed frontally to the frame (replaceable with no need to remove the worktop). Reversible doors. Equipped with 2 set of runners + 2 GN I/I plastic-coated steel grid.



| RANGE                 | CODE        | MODEL      | FUNCTION  |
|-----------------------|-------------|------------|---|
| Refrigerated Counters | MACRO000630 | TRT2PPTNPA | Refrigerated Counters MI - Fitted for Remote Unit |

ITEM

Refrigerated counter MI 2 doors -2+8°C fitted for remote unit, with top and backsplash

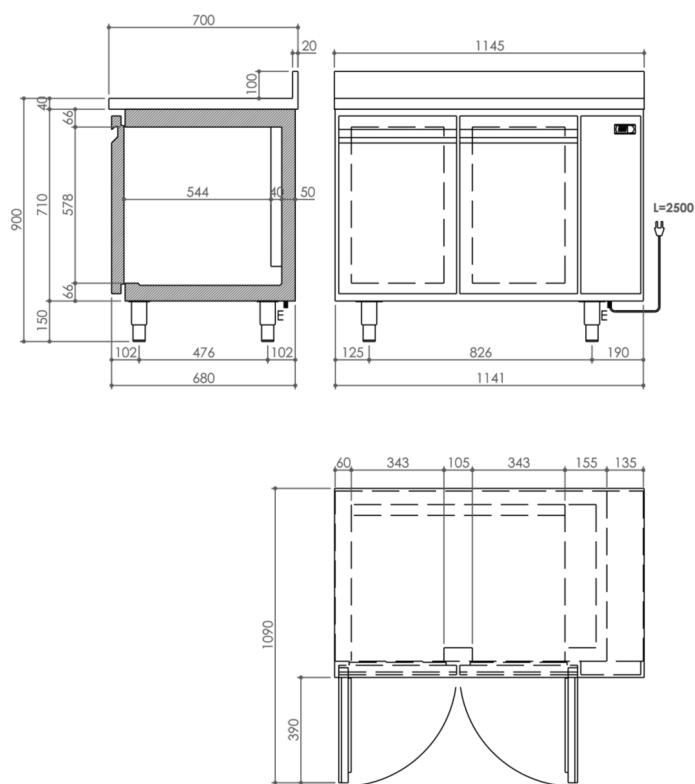

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection:

VAC230 50Hz

Type of electrical plug:

with Schuko plug and cable

