

| RANGE | CODE | MODEL | FUNCTION |
|-----------------------|--------------|------------|---|
| Refrigerated Counters | MACRO0000640 | TRT2PPBTSP | Refrigerated Counters MI - Fitted for Remote Unit |

ITEM

Refrigerated counter MI 2 doors -10-20°C fitted for remote unit, without top



| RANGE | CODE | MODEL | FUNCTION |
|-----------------------|-------------|------------|---|
| Refrigerated Counters | MACRO000640 | TRT2PPBTSP | Refrigerated Counters MI - Fitted for Remote Unit |

ITEM

Refrigerated counter MI 2 doors -10-20°C fitted for remote unit, without top



TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--|
| RANGE: | -20/-10°C |
| WIDTH (mm): | 1141 |
| DEPTH (mm): | 680 |
| HEIGHT (mm): | 850 |
| WEIGHT (Kg): | 122 |
| VOLUME (m ³): | 0.87 |
| EL. POWER (kW): | 0.1 |
| VOLTAGE: | VAC230 |
| FREQUENCY (Hz): | 50Hz |
| INTERNAL DIM. (mm): | 791x530x580(h) mm |
| EXTERNAL MATERIAL: | 304 |
| INTERNAL MATERIAL: | 304 |
| GROSS CAPACITY (L): | 243 |
| OPERATING MODE: | Ventilated |
| DOORS: | 2 Doors |
| STANDARD EQUIPMENT: | 1 Plastic-coated grid GNI/I for each door. |
| DEFROST TYPE: | Electric |
| REFRIGERANT POWER: | 500 |
| GAS TYPE: | R452a |
| CLIMATE CLASS: | 5 + 40°C 40% |

DESCRIPTION


Refrigerated counter -10 -20°C with valve fitting for remote refrigeration unit. single-shell structure in stainless steel AISI 304. Without top. External scotch-brite satin finish. 60mm insulation thickness for the casing and 50mm for the doors with high density foam (40 kg/mc). External back plate in galvanized steel, as option in stainless steel AISI 304 scotch-brite. Feet in stainless steel adjustable in height H 140/230mm. Cell with rounded corners for a more effective internal cleaning. Self-closing doors with safety stop at 95°. Easily removable door and drawers magnetic gaskets. Ducted ventilation system on the back for a perfect and homogeneous internal temperature. Electric defrosting and automatic evaporation of condensation water. Ergonomic handles. On request with the technical compartment on the left. Standard power supply 220-240V 50/60Hz. Cooling gas R452a. Upper and lower door hinges fixed frontally to the frame (replaceable with no need to remove the worktop). Reversible doors. Equipped with 2 set of runners + 2 GN I/I plastic-coated steel grid.



| RANGE | CODE | MODEL | FUNCTION |
|-----------------------|-------------|------------|---|
| Refrigerated Counters | MACRO000640 | TRT2PPBTSP | Refrigerated Counters MI - Fitted for Remote Unit |

ITEM

Refrigerated counter MI 2 doors -10-20°C fitted for remote unit, without top

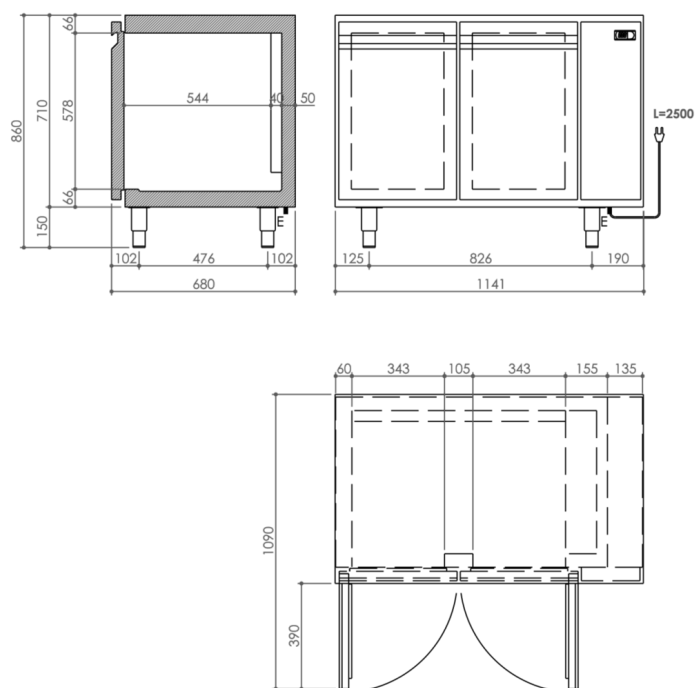

INSTALLATION SPECIFICATIONS

| | |
|----------------------------|----------------------------|
| (E) Electrical Connection: | VAC230 50Hz |
| Type of electrical plug: | with Schuko plug and cable |

