

RANGE	CODE	MODEL	FUNCTION
Refrigerated Cabinets	MACRO000261	ARS7BT	Refrigerated cabinets MI - Pressed sides

ITEM


Upright cabinet MI S 1 door 700 litres, freezer -20/-10°C



RANGE	CODE	MODEL	FUNCTION
Refrigerated Cabinets	MACROOOO261	ARS7BT	Refrigerated cabinets MI - Pressed sides

## ITEM

Upright cabinet MI S I door 700 litres, freezer -20/-10°C

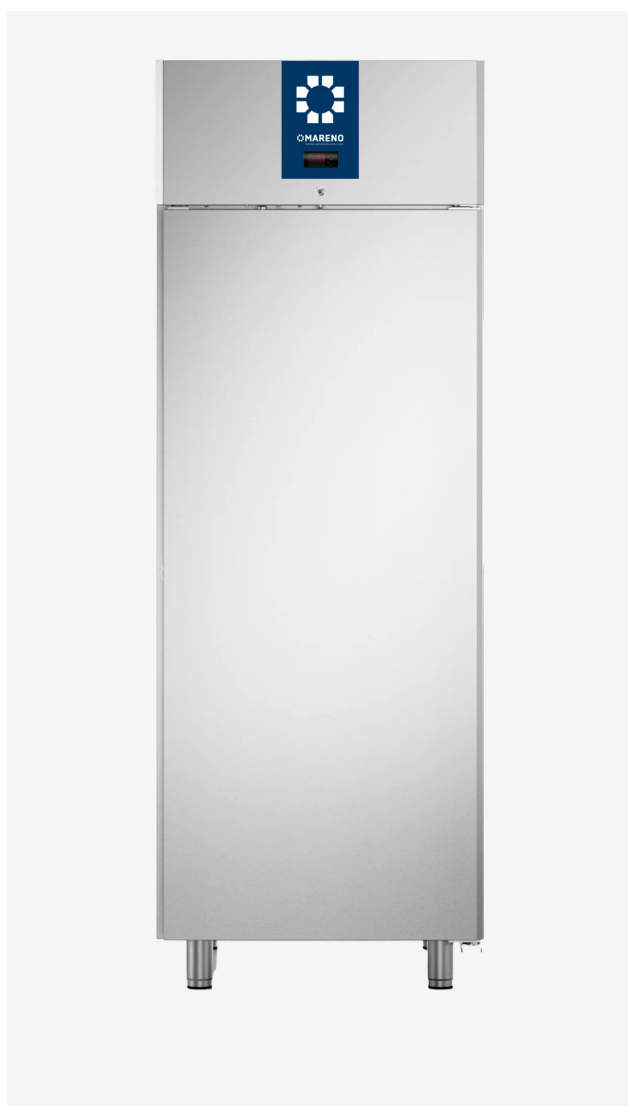

## TECHNICAL SPECIFICATIONS

RANGE:	-20/-10°C
WIDTH (mm):	720
DEPTH (mm):	840
HEIGHT (mm):	2025
WEIGHT (Kg):	140
VOLUME (m <sup>3</sup> ):	1.45
EL. POWER (kW):	0.53
VOLTAGE:	VAC230
FREQUENCY (Hz):	50Hz
INTERNAL DIM. (mm):	537x702,5x1440(h)
EXTERNAL MATERIAL:	304
INTERNAL MATERIAL:	304
GROSS CAPACITY (L):	540
OPERATING MODE:	Ventilated
DOORS:	1 Door
STANDARD EQUIPMENT:	N° 3 Plastic-Coated Grid 530x650
DEFROST TYPE:	Automatic by Hot Gas
REFRIGERANT POWER:	600
ENERGY CLASS:	<b>B</b>
REFRIGERANT QUANTITY (g):	120
NOISE LEVEL:	58
ENERGY PER YEAR:	1289
CLIMATE CLASS:	5 40°C-40 <sup>+</sup>

## DESCRIPTION


Stainless steel AISI 304 single-shell structure; scotch-brite external satin finish; 90 mm high density HFC free polyurethane foam insulation (40kg/m<sup>3</sup>) for the body and 65mm thickness for the door; stainless steel adjustable feet h120/150; cell with rounded internal edges for a perfect cleaning and hygiene; hot gas defrosting and condensation water evaporation; GN rlsan grids; pressed internal panels for 24 GN 2/1 grids; grid spacing 55 mm; rear ducted air flow; self-closing doors from 100°; patented and tropicalized monobloc refrigerating unit (climatic class 5); lock as standard; standard power supply 230V/50Hz monophase. Equipped with 3 grids GN 2/1. Refrigerant gas R290. Energy Efficiency class B (1289 kWh/year)



RANGE	CODE	MODEL	FUNCTION
Refrigerated Cabinets	MACRO000261	ARS7BT	Refrigerated cabinets MI - Pressed sides

ITEM

Upright cabinet MI S I door 700 litres, freezer -20°/-10°C

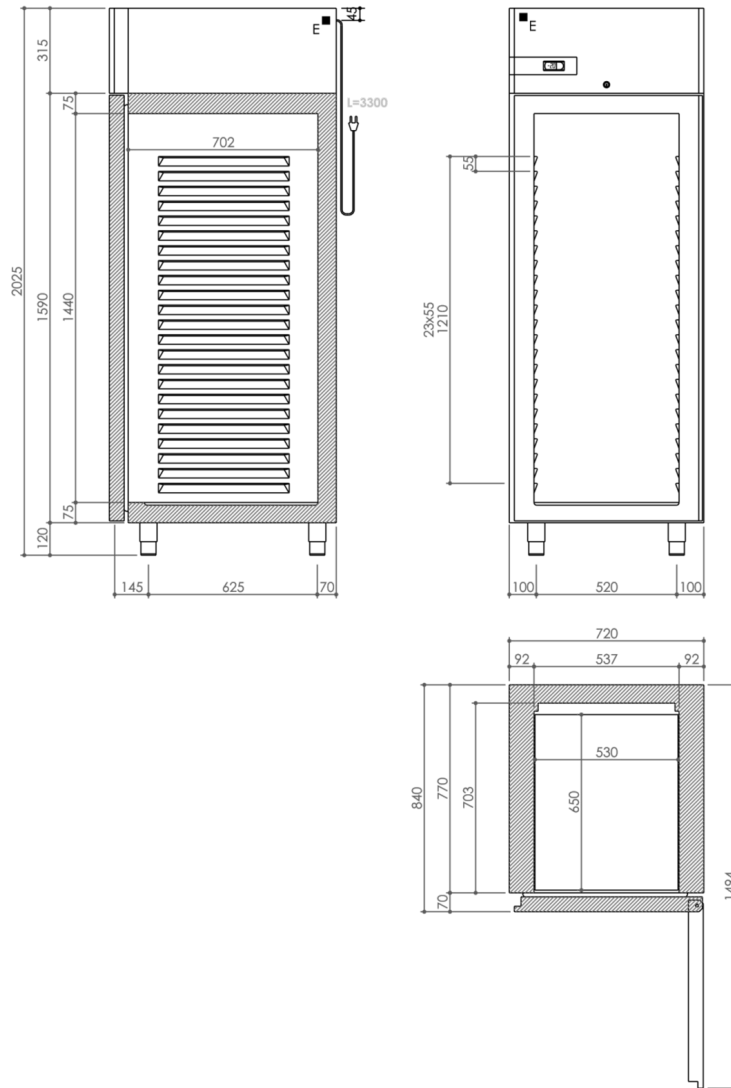

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection: **VAC230 50Hz**  
Type of electrical plug: **with Schuko plug and cable**

