

RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOO9O5O	CI78EGF	Induction Ranges

ITEM

2 zone front induction top on open stand



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOO9O5O	CI78EGF	Induction Ranges

ITEM

2 zone front induction top on open stand



TECHNICAL SPECIFICATIONS

WIDTH (mm):	800
DEPTH (mm):	750
HEIGHT (mm):	900
WEIGHT (Kg):	62
VOLUME (m ³):	0.8
EL. POWER (kW):	10
VOLTAGE:	VAC400-3
INTERNAL BASE UNIT DIM. (mm):	720x400(h)x700 mm
COOKING ZONES N°:	2
COOKING ZONES DIM. (mm):	2x Ø230mm
COOKING ZONE DETAILS:	2x 5kW
IP GRADE:	IPX5

DESCRIPTION


Freestanding induction boiling top, on open cabinet base, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 2 independent cooking zones, fixed to the front of the worktop, each with underlying 5 kW Ø 230 mm round inductors. Pan detection system that activates heating when cooking receptacle is present. The cooking zones are identified by screen printed markings and equipped with residual heat indicators. IO-position energy selector for heat control with shape designed to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Integral power-box complete with main safety sensor. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOO9O5O	CI78EGF	Induction Ranges

ITEM

2 zone front induction top on open stand

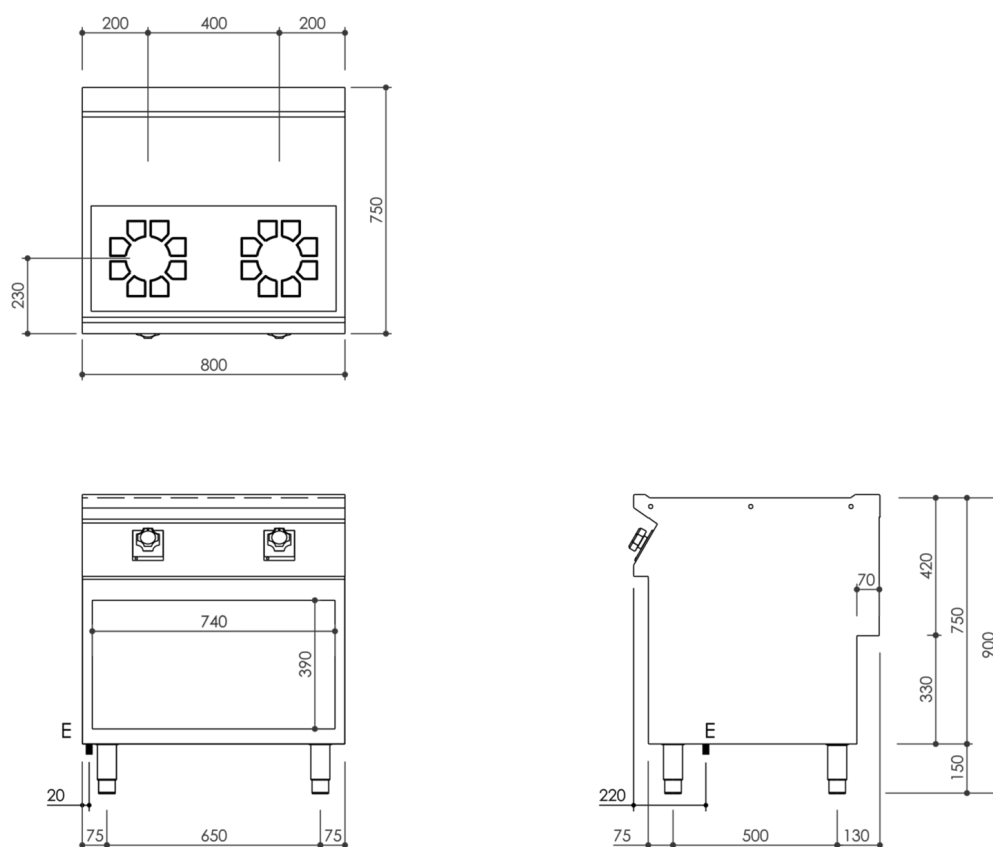

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **VAC400-3 50/60 Hz**

