

RANGE

Blast Chillers

CODE

RF42IMABEYBIOOEE3A

MODEL

MSTO51R

ITEM

Mixed blast chiller 5xGN I/I prepared for remote motor



RANGE

CODE

MODEL

Blast Chillers

RF42IMABEYBIOOEE3A

MSTO51R

ITEM

Mixed blast chiller 5xGN I/I prepared for remote motor



TECHNICAL SPECIFICATIONS

WIDTH (mm):	790
DEPTH (mm):	820
HEIGHT (mm):	900
WEIGHT (Kg):	150
VOLUME (m ³):	0.86
EL. POWER (kW):	1.38
VOLTAGE:	220V-IN+ PE
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	400x430x670(h) mm
INSULATION THICKNESS (mm):	60
REFRIGERANT POWER (W):	814
GN - TRAY CAPACITY:	38513
INTERAXIS (mm):	70
REFRIGERANT QUANTITY (g):	1000
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	25
FAST CHILLING YIELD (-18°C) - Kg:	15
YIELD PER CYCLE +65/+10°C - Kg:	20
YIELD PER CYCLE +65/-18°C - Kg:	10

DESCRIPTION

Blast Chilling mixed temperature from + 90°C to +3°C/from +90°C to -18°C. Tray capacity GN I/I x IO/6/5 distance between trays 35/53/70 mm. Full length side tray (530 mm.) insertion,with electronic control, extractable tray holder. Remote cooled unit. Left hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg. 25 from +90° C to +3° C / kg,15 from +90°C to -18°C. Output per cycle according to EN17032 20 kg from +65/+10°C and 10 kg from +65/-18°. Equipped with heatable core temperature probe. Remote condensing unit not included.



RANGE

CODE

MODEL


Blast Chillers

RF42IMABEYBIOOEE3A

MSTO51R

ITEM

Mixed blast chiller 5xGN I/I prepared for remote motor

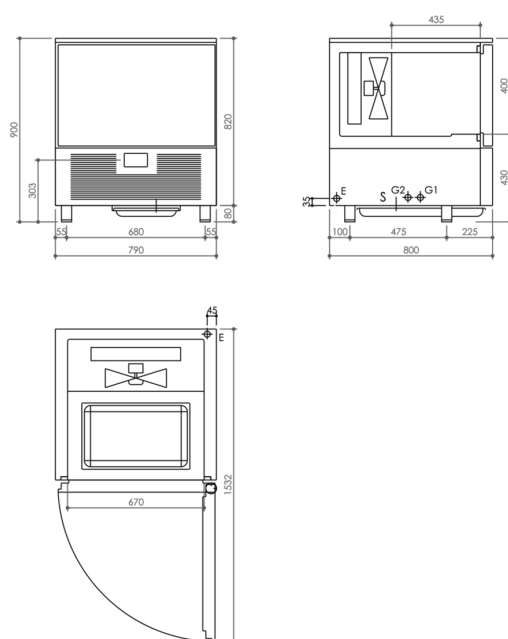

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	220V-IN+PE 50 Hz
(S):	Drain Connection
(H3):	Water Inlet Connection
(H4):	Water Outlet Connection
(G1):	Refrigerant Gas Inlet Connection
(G2):	Refrigerant gas outlet connection

