

RANGE

Blast Chillers

CODE

RF42IMABEYCIOOEF3A

MODEL

MSTO8IR

ITEM

Programmable blast chiller mixed temperatures 8 x GN 1/1 prepared for remote air cooled unit



RANGE

Blast Chillers

CODE

RF42IMABEYCIOOEF3A

MODEL

MSTO8IR

ITEM

Programmable blast chiller mixed temperatures 8 x GN I/I prepared for remote air cooled unit



TECHNICAL SPECIFICATIONS

WIDTH (mm):	790
DEPTH (mm):	870
HEIGHT (mm):	1460
WEIGHT (Kg):	190
VOLUME (m ³):	1.39
EL. POWER (kW):	1.73
VOLTAGE:	220V-IN+ PE
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	670x450x730(h) mm
INSULATION THICKNESS (mm):	60
REFRIGERANT POWER (W):	1212
GN - TRAY CAPACITY:	40I65
INTERAXIS (mm):	73
REFRIGERANT QUANTITY (g):	1200
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	30
FAST CHILLING YIELD (-18°C) - Kg:	20
YIELD PER CYCLE +65/+10°C - Kg:	25
YIELD PER CYCLE +65/-18°C - Kg:	15

DESCRIPTION

Blast Chilling mixed temperature from +90°C to +3°C/from +90°C to -18°C. Tray capacity GN I/I x 18/12/9, distance between trays 37/55/75 mm. Full height side tray (530 mm.) insertion. Programmable blast chiller with electronic control, fitted with automatic defrosting-system, starting up sterilizer system, extractable tray holder. Remote cooled unit. Right hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg. 30 from +90° C to +3° C / kg. 20 from +90°C to -18°C. Output per cycle according to EN17032 25 kg from +65/+10°C and 15 kg from +65/-18°. Equipped with heatable core temperature probe. Remote condensing unit not included



RANGE

Blast Chillers

CODE


RF42IMABEYCIOOEF3A

MODEL

MSTO8IR

ITEM

Programmable blast chiller mixed temperatures 8 x GN I/I prepared for remote air cooled unit

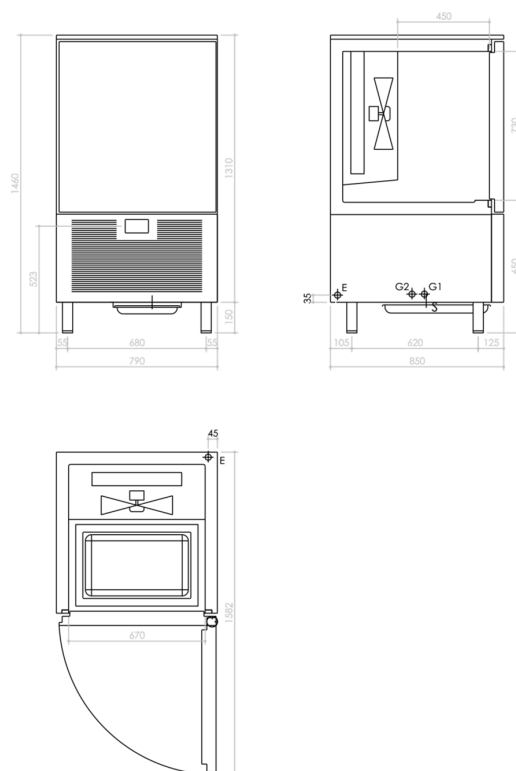

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	220V-IN+PE 50 Hz
(S):	Drain Connection
(G1):	Refrigerant Gas Inlet Connection
(G2):	Refrigerant gas outlet connection

