

RANGE

Blast Chillers

CODE

RF42GMAEEYDIO4EF3A

MODEL

MST120R

ITEM

Programmable mixed blast chiller IOxGN I/I prepared for remote motor. With extractable oven tray rack



RANGE

CODE

MODEL

Blast Chillers

RF42GMAEEYDIO4EF3A

MSTI2OR

ITEM

Programmable mixed blast chiller IOxGN I/I prepared for remote motor. With extractable oven tray rack



TECHNICAL SPECIFICATIONS

WIDTH (mm):	850
DEPTH (mm):	870
HEIGHT (mm):	1860
WEIGHT (Kg):	240
VOLUME (m ³):	1.85
EL. POWER (kW):	2.18
VOLTAGE:	220V-IN+ PE
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	730x483x880(h) mm
INSULATION THICKNESS (mm):	60
REFRIGERANT POWER (W):	1230
GN - TRAY CAPACITY:	22/14/10
INTERAXIS (mm):	75
REFRIGERANT QUANTITY (g):	1300
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	55
FAST CHILLING YIELD (-18°C) - Kg:	35
YIELD PER CYCLE +65/+10°C - Kg:	50
YIELD PER CYCLE +65/-18°C - Kg:	30

DESCRIPTION

Blast Chilling mixed temperature from +90°C to +3°C/from +90°C to -18°C. Suitable for extractable tray rack for GN I/I oven. Tray capacity GN I/I x 22/14/10, distance between trays 38/57/75 mm. Full length side tray (530 mm.) insertion. Programmable blast chiller with electronic control, fitted with automatic defrosting-system, starting up sterilizer system, extractable tray holder. Remote cooled unit. Right hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg. 55 from +90° C to +3° C / kg.35 from +90°C to -18°C. Output per cycle according to EN17032 50 kg from +65/+10°C and 30 kg from +65/-18°Equipped with heatable core temperature probe. Remote condensing unit not included.



RANGE

CODE

MODEL


Blast Chillers

RF42GMAEEYDIO4EF3A

MSTI2OR

ITEM

Programmable mixed blast chiller IOxGN I/I prepared for remote motor. With extractable oven tray rack

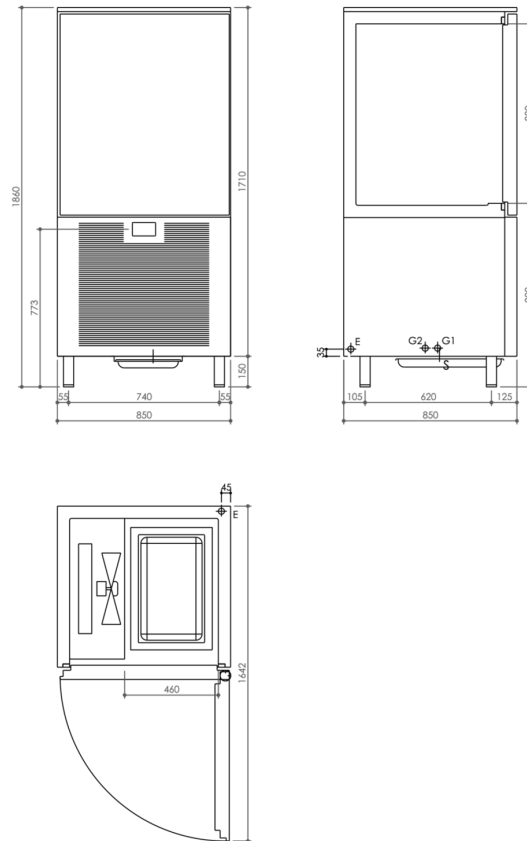

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	220V-IN+PE 50 Hz
(S):	Drain Connection
(G1):	Refrigerant Gas Inlet Connection
(G2):	Refrigerant gas outlet connection

