

RANGE

Blast Chillers

CODE

RF421MAEKYDIOOEF3A

MODEL

MST121A-R290

ITEM

Programmable blast chiller mixed temperatures 12 x GN 1/1 with aire cooled system



RANGE

Blast Chillers

CODE

RF421MAEKYDIOOEF3A

MODEL

MST121A-R290

ITEM

Programmable blast chiller mixed temperatures 12 x GN I/I with aire cooled system



TECHNICAL SPECIFICATIONS

WIDTH (mm):	790
DEPTH (mm):	870
HEIGHT (mm):	1810
WEIGHT (Kg):	230
VOLUME (m ³):	1.7
EL. POWER (kW):	2.18
VOLTAGE:	3N-AC 400 V
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	670x450x930(h) mm
INSULATION THICKNESS (mm):	60
REFRIGERANT POWER (W):	1230
GN - TRAY CAPACITY:	24/16/12
INTERAXIS (mm):	73
GAS TYPE:	R290
REFRIGERANT QUANTITY (g):	520
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	55
FAST CHILLING YIELD (-18°C) - Kg:	35
YIELD PER CYCLE +65/+10°C - Kg:	50
YIELD PER CYCLE +65/-18°C - Kg:	30

DESCRIPTION

Blast Chilling mixed temperature from +90°C to +3°C/from +90°C to -18°C. Tray capacity GN I/I x 24/16/12, distance between trays 35/55/73 mm. Full legth side tray (530 mm.) insertion. Programmable blast chiller with electronic control, fitted with automatic defrosting-system, starting up sterilizer system, extractable tray holder. Air cooled unit, refrigerant gas R290. Right hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg. 55 from +90° C to +3° C / kg.35 from +90°C to -18°C. Output per cycle according to EN17032 50 kg from +65/+10°C and 30 kg from +65/-18°Equipped with hatable core temperature probe.



RANGE

Blast Chillers

CODE


RF421MAEKYDIOOEF3A

MODEL

MST121A-R290

ITEM

Programmable blast chiller mixed temperatures 12 x GN I/I with aire cooled system

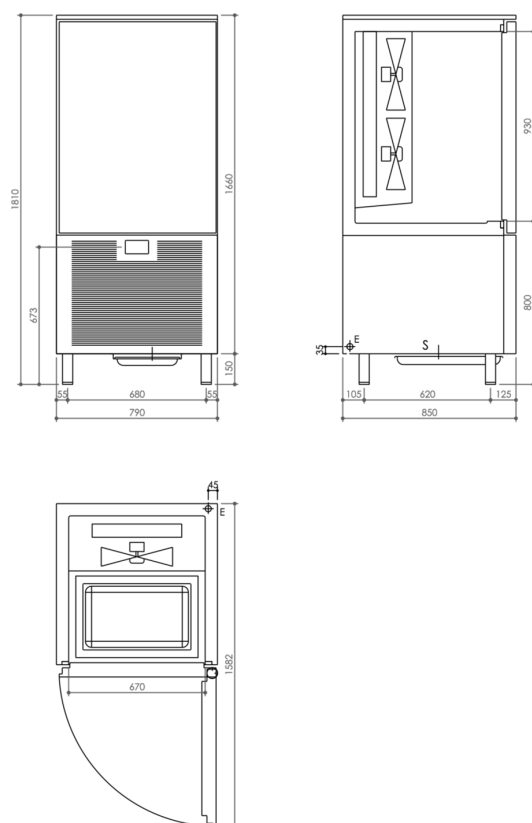

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **3N-AC 400 V 50 Hz**

(S): **Drain Connection**

