

RANGE

Blast Chillers

CODE

RF42IMAEYEIOEF3A

MODEL

MST161R

ITEM

Programmable mixed blast chiller 16xGN 1/1 prepared for remote motor



RANGE

CODE

MODEL

Blast Chillers

RF42IMAEYEIOOEF3A

MST161R

ITEM

Programmable mixed blast chiller 16xGN 1/1 prepared for remote motor



TECHNICAL SPECIFICATIONS

WIDTH (mm):	790
DEPTH (mm):	870
HEIGHT (mm):	1960
WEIGHT (Kg):	250
VOLUME (m ³):	1.82
EL. POWER (kW):	2.9
VOLTAGE:	400V-3N+PE
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	670x450x1130(h) mm
INSULATION THICKNESS (mm):	60
REFRIGERANT POWER (W):	1940
GN - TRAY CAPACITY:	28/18/14
INTERAXIS (mm):	73
REFRIGERANT QUANTITY (g):	1800
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	75
FAST CHILLING YIELD (-18°C) - Kg:	50
YIELD PER CYCLE +65/+10°C - Kg:	70
YIELD PER CYCLE +65/-18°C - Kg:	40

DESCRIPTION

Blast Chilling mixed temperature from +90°C to +3°C/from +90°C to -18°C. Tray capacity GN 1/1 x 28/18/14, distance between trays 37/55/73 mm. Full leght side tray (530 mm.) insertion. Programmable blast chiller electronic control, fitted with automatic defrosting-system, starting up sterilizer system, extractable tray holder. Remote cooled unit. Right hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg. 75 from +90° C to +3° C / kg.50 from +90°C to -18°C. Output per cycle according to EN17032 70 kg from +65/+10°C and 40 kg from +65/-18°. Equipped with core temperature probe. Remote condensing unit not included.



RANGE

CODE

MODEL


Blast Chillers

RF42IMAEYEIOOEF3A

MST161R

ITEM

Programmable mixed blast chiller 16xGN 1/1 prepared for remote motor

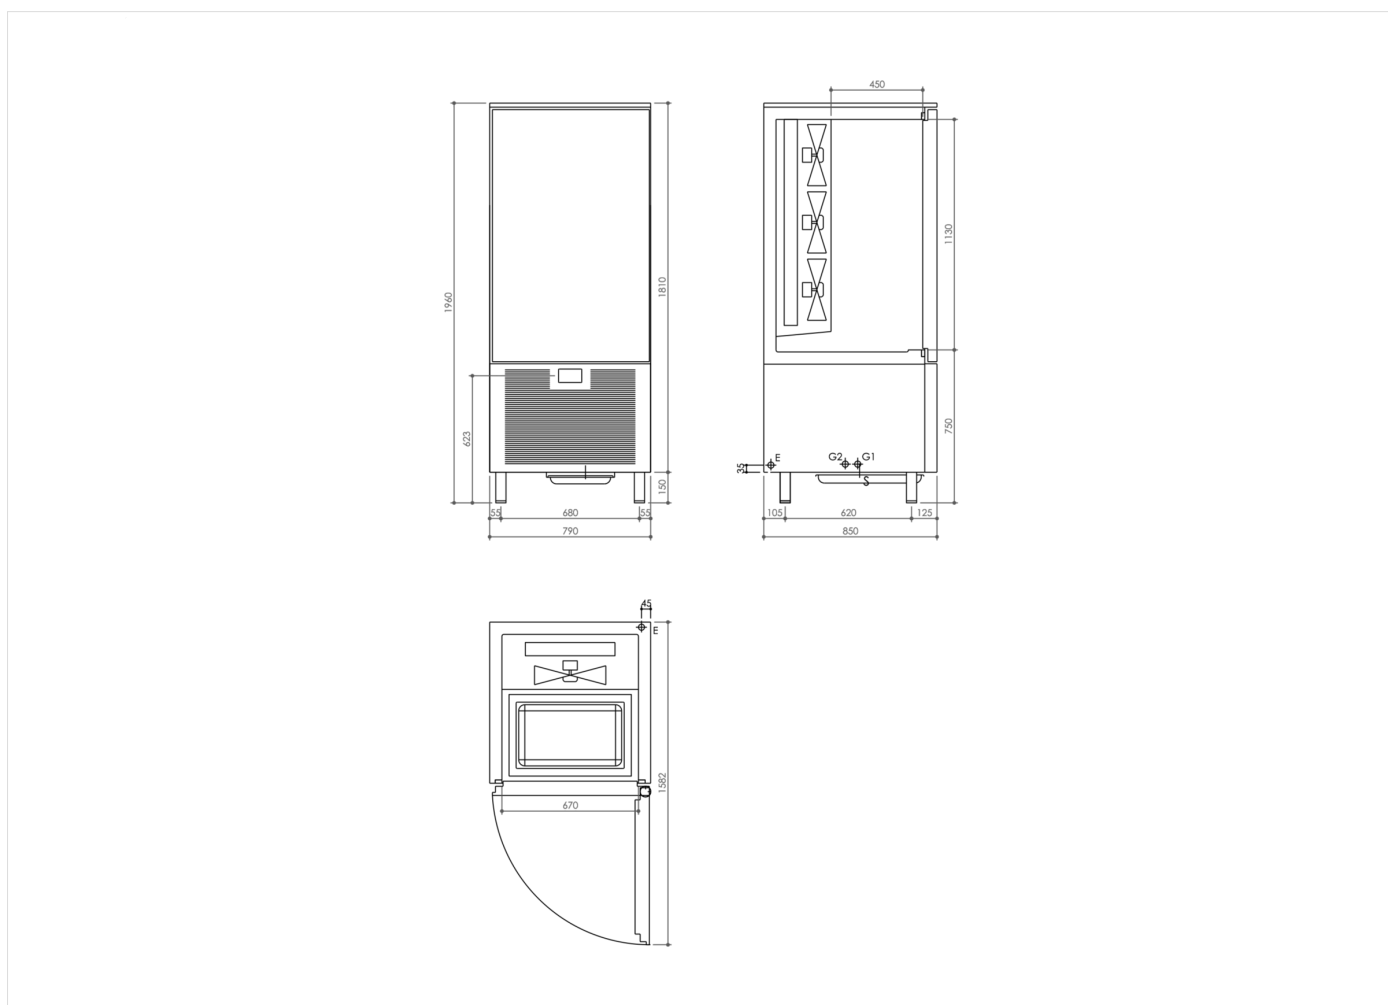

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	400V-3N+PE 50 Hz
(S):	Drain Connection
(G1):	Refrigerant Gas Inlet Connection
(G2):	Refrigerant gas outlet connection

