

RANGE

Blast Chillers

CODE

RF42BMAEKFFIOOAF3A

MODEL

MC122A-R290

ITEM

Multifunction blast chiller 24 x GN 1/1 with air cooled system



RANGE

Blast Chillers

CODE

RF42BMAEKFFIOOAF3A

MODEL

MC122A-R290

ITEM

Multifunction blast chiller 24 x GN 1/1 with air cooled system



TECHNICAL SPECIFICATIONS

WIDTH (mm):	1100
DEPTH (mm):	1080
HEIGHT (mm):	1860
WEIGHT (Kg):	295
VOLUME (m ³):	2.85
EL. POWER (kW):	6.5
VOLTAGE:	400V-3N+PE
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	670x930x880(h) mm
INSULATION THICKNESS (mm):	60
REFRIGERANT POWER (W):	3307
GN - TRAY CAPACITY:	44/28/22
INTERAXIS (mm):	75
GAS TYPE:	R290
REFRIGERANT QUANTITY (g):	2300
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	100
FAST CHILLING YIELD (-18°C) - Kg:	60
YIELD PER CYCLE +65/+10°C - Kg:	100
YIELD PER CYCLE +65/-18°C - Kg:	60

DESCRIPTION

Multifunction blast chiller with air cooling system, tray capacity GN 1/1 x 44/28/22, distance between trays 38/57/75 mm. 7" touch-screen control panel with 5 options: positive blast chilling + conservation phase, negative blast chilling + conservation phase, thawing, proofing retarder, low temperature cooking + chilling, low temperature cooking. working temperature range +85° / -18°. High performance copper aluminium condenser class T, ambient temperature + 43°. Output per cycle (+65°/+10°) kg. 90. Output per cycle (+65°/-18°) kg. 60. Heating element in the door frame. Hot gas defrosting system. R290 ecological refrigerant fluid. Copper-aluminium evaporator with cataphoresis anti-corrosion treatment. High performance copper-aluminium condenser. Inner dimensions of the chamber 670x930x880 mm. Minimum wheelbase for tray holder guides 18,75 mm. High density polyuretane's insulation (approx 42 kg/m³). HCFC free. Side Panel thickness: 60 mm. Back panel thickness 60 mm.



RANGE

CODE

MODEL


Blast Chillers

RF42BMAEKFFIOOAF3A

MC122A-R290

ITEM

Multifunction blast chiller 24 x GN 1/1 with air cooled system

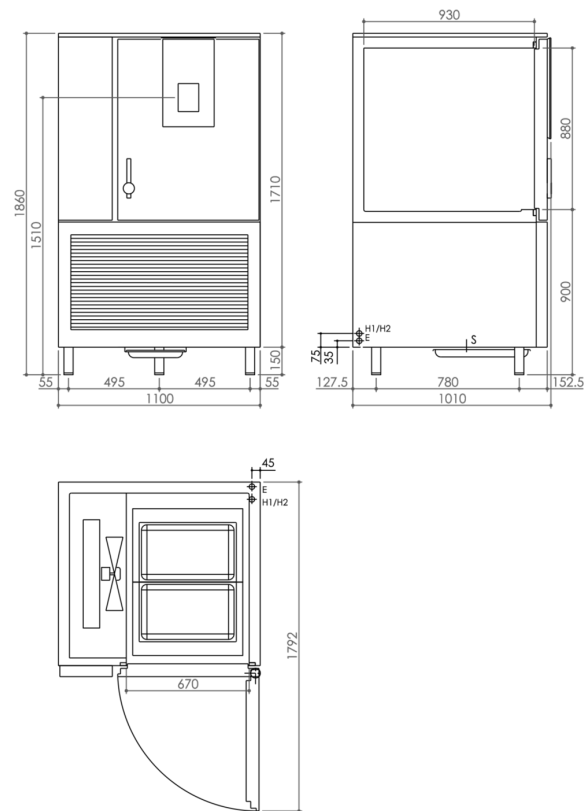

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	400V-3N+PE 50 Hz
(S):	Drain Connection
(H1):	Water Inlet Connection
(H2):	Water Outlet Connection
(H3):	Water Inlet Connection
(H4):	Water Outlet Connection

