

RANGE

Blast Chillers

CODE

RF42TMAEEFG3I2CCIA

MODEL

MCP20I

ITEM

Multifunction pass through blast chiller 20 x GN I/I prepared for remote air cooled unit



RANGE

CODE

MODEL

Blast Chillers

RF42TMAEEFG3I2CCIA

MCP20I

ITEM

Multifunction pass through blast chiller 20 x GN I/I prepared for remote air cooled unit



TECHNICAL SPECIFICATIONS

WIDTH (mm):	1300
DEPTH (mm):	1275
HEIGHT (mm):	2300
WEIGHT (Kg):	567
VOLUME (m ³):	5.77
EL. POWER (kW):	5
VOLTAGE:	400V-3N+PE
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	680x910x1820(h) mm
INSULATION THICKNESS (mm):	80
REFRIGERANT POWER (W):	37300
GN - TRAY CAPACITY:	20x GN I/I (1 rack trolley)
GASTYPE:	R290
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	150
FAST CHILLING YIELD (-18°C) - Kg:	100
YIELD PER CYCLE +65/+10°C - Kg:	140
YIELD PER CYCLE +65/-18°C - Kg:	80

DESCRIPTION

Multifunction pass through blast chiller suitable for tray holder rack 20 x GN I/I with remote air cooling system. 7" touch-screen control panel with 5 options: positive blast chilling + conservation phase, negative blast chilling + conservation phase, thawing, proofing retarder, low temperature cooking + chilling, low temperature cooking. working temperature range +85° / -18°. High performance copper aluminium condenser class T, ambient temperature + 43°. Output per cycle (+65°/+10°) kg. 140. Output per cycle (+65°/-18°) kg. 80. Heating element in the door frame. Hot gas defrosting system. Inner dimensions of the chamber 680x950x1820 mm. Side Panel thickness: 80 mm. Back panel thickness 60 mm. Remote condensing unit.



RANGE

CODE

MODEL


Blast Chillers

RF42TMAEEFG3I2CCIA

MCP20I

ITEM

Multifunction pass through blast chiller 20 x GN I/I prepared for remote air cooled unit

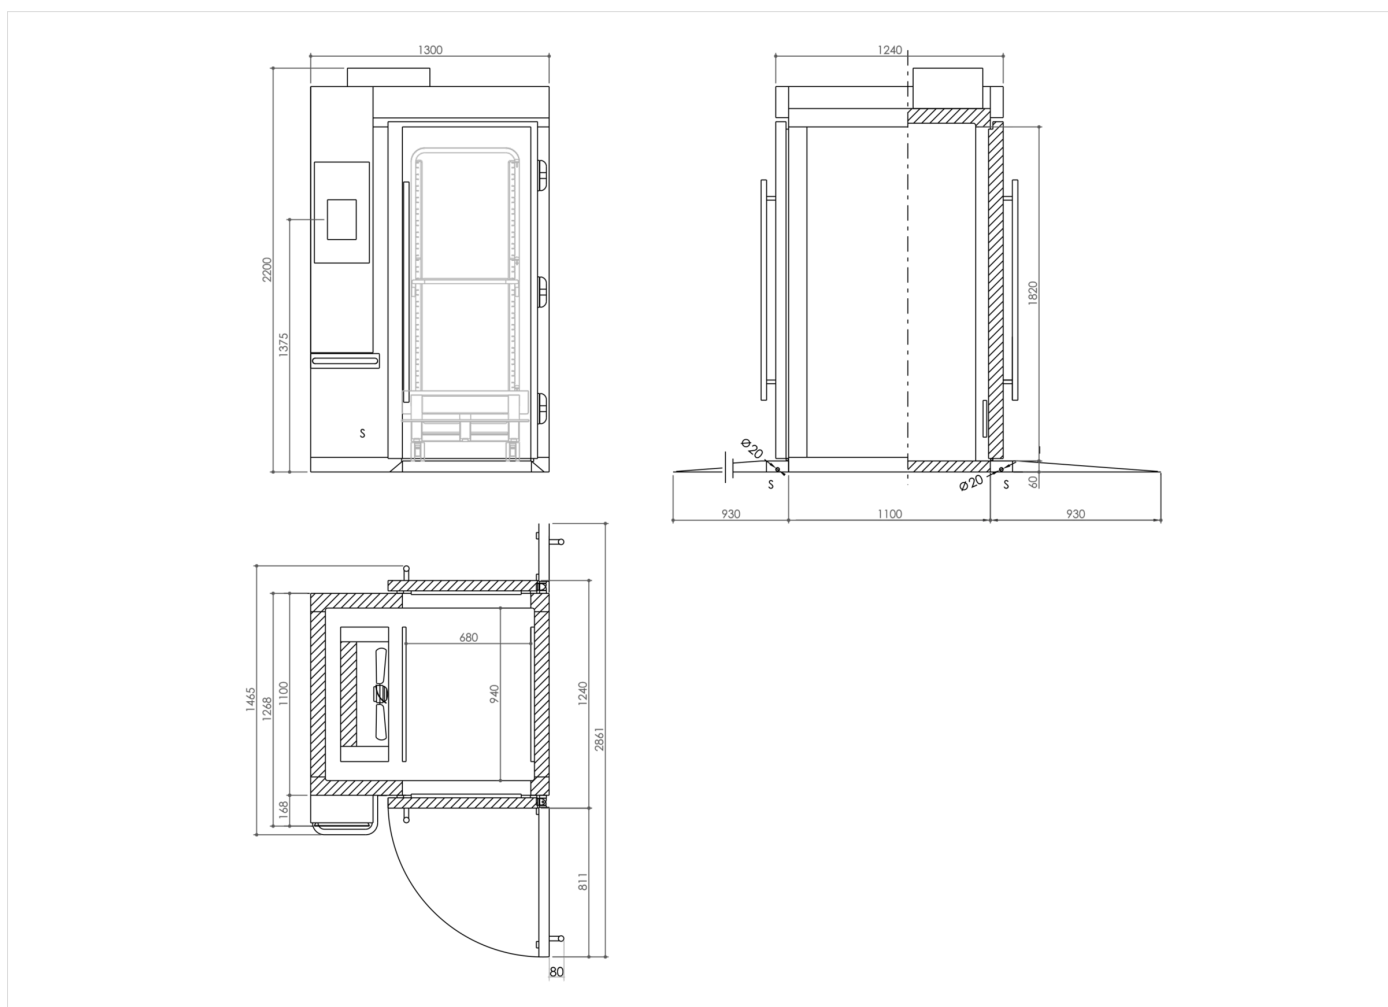

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **400V-3N+PE 50 Hz**

(S): **Drain Connection**

