

RANGE

Roll in rapid blast chillers

CODE

RF42XMAEKYG103ACIA

MODEL

MST191A

ITEM

Programmable roll in blast chiller mixed temperatures 20 x GN I/I with air cooled system and core probe



RANGE

Roll in rapid blast chillers

CODE

RF42XMAEKYGIO3ACIA

MODEL

MST191A

ITEM

Programmable roll in blast chiller mixed temperatures 20 x GN I/I with air cooled system and core probe**TECHNICAL SPECIFICATIONS**

WIDTH (mm):	890
DEPTH (mm):	1345
HEIGHT (mm):	2400
WEIGHT (Kg):	570
VOLUME (m ³):	2.83
EL. POWER (kW):	3.6
VOLTAGE:	380-420 3N
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	680x835x1820(h) mm
INSULATION THICKNESS (mm):	80
DEFROST TYPE:	Open Door
GAS TYPE:	R290
FAST CHILLING YIELD (+3°C) - Kg:	90
FAST CHILLING YIELD (-18°C) - Kg:	50

DESCRIPTION

Blast Chiller cold rooms, floor standing model, equipped with remote condensing unit. Blast Chilling mixed temperature from +90°C to +3°C/from +90°C to -18°C. Tray capacity 20 x GN I/I. Programmable blast chiller cold-rooms with electronic control, fitted with automatic defrosting-system, starting up sterilizer system, extractable tray holder. Air cooled unit, refrigerant gas R290. Right hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg.105 from +90° C to +3° C / kg.70 from +90°C to -18°C. Equipped with core temperature probe. Suitable for trolley MKS20I, or MCT20II not delivered as standard supply.



RANGE

Roll in rapid blast chillers

CODE


RF42XMAEKYGIO3ACIA

MODEL

MST191A

ITEM

Programmable roll in blast chiller mixed temperatures 20 x GN I/I with air cooled system and core probe

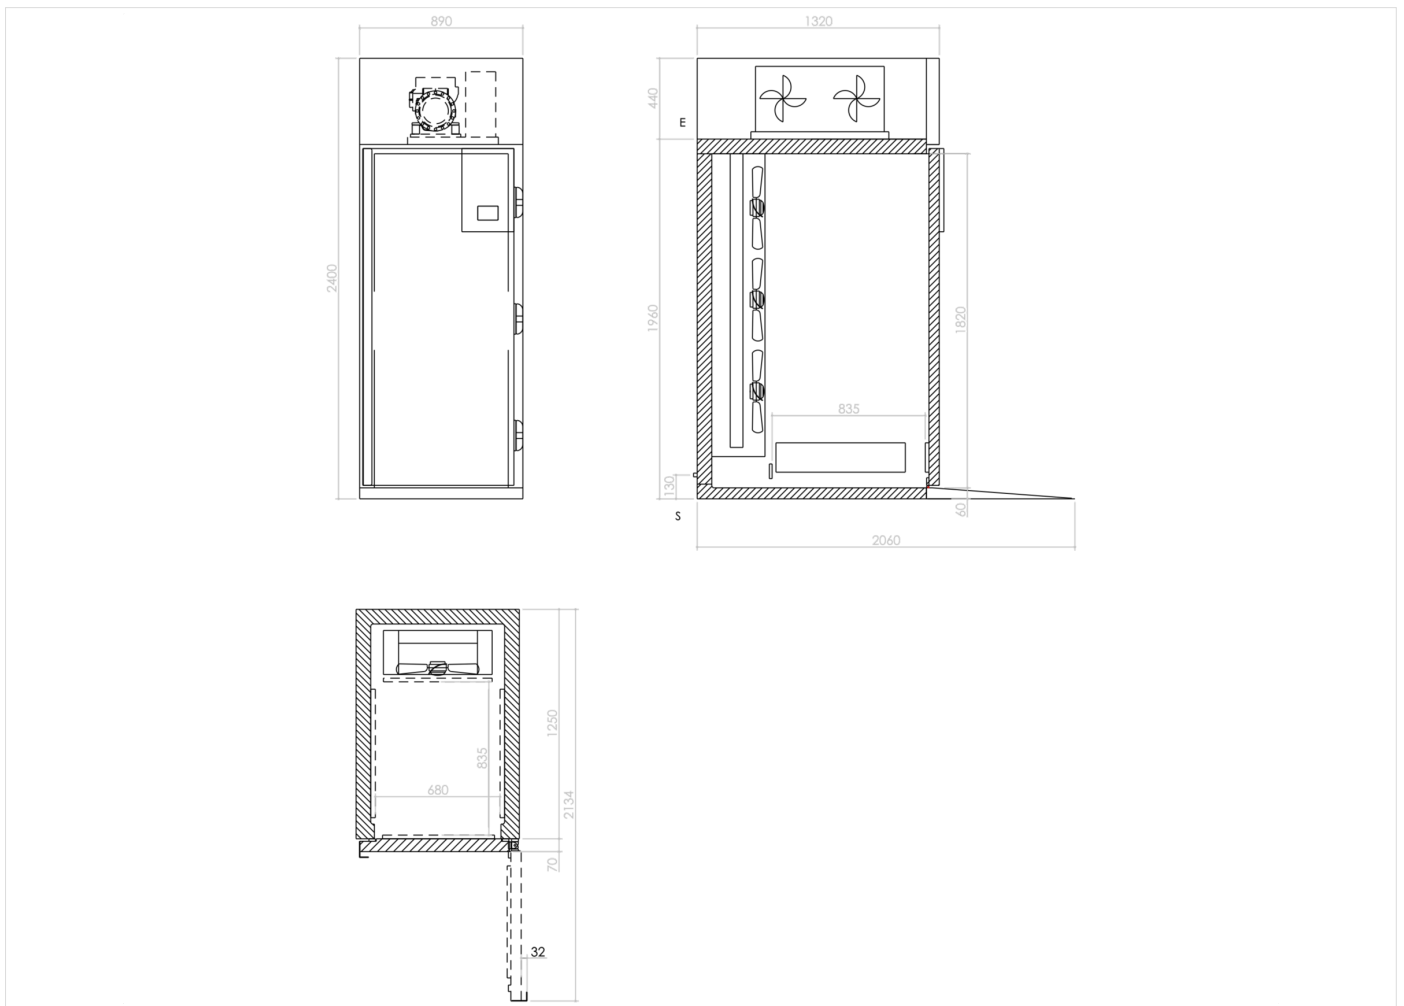

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: 380-420 3N 50 Hz

(S): Drain Connection

