

RANGE

Roll in rapid blast chillers

CODE

RF42TMAEEGJ3I2ACIA

MODEL

MSTP202

ITEM

Programmable roll in pass through blast chiller mixed temperatures 20xGN 2/1 prepared for remote air cooled unit



RANGE

Roll in rapid blast chillers

CODE

RF42TMAEEGJ3I2ACIA

MODEL

MSTP202

ITEM

Programmable roll in pass through blast chiller mixed temperatures 20xGN 2/I prepared for remote air cooled unit



TECHNICAL SPECIFICATIONS

WIDTH (mm):	1500
DEPTH (mm):	1530
HEIGHT (mm):	2100
WEIGHT (Kg):	630
VOLUME (m ³):	4.81
EL. POWER (kW):	0.64
VOLTAGE:	380-420 3N
FREQUENCY (Hz):	50 Hz
INTERNAL DIM. (mm):	1500x1530x2100(h) mm
INSULATION THICKNESS (mm):	80
CLIMATE CLASS:	5
FAST CHILLING YIELD (+3°C) - Kg:	120
FAST CHILLING YIELD (-18°C) - Kg:	80
YIELD PER CYCLE +65/+10°C - Kg:	170
YIELD PER CYCLE +65/-18°C - Kg:	110

DESCRIPTION

Blast Chiller cold rooms, floor standing pass-through model, equipped with remote condensing unit. Blast chilling from +9°C to +3°C. Tray capacity 20 x GN 2/I. Pass-through programmable cold-rooms with electronic control, fitted with automatic defrosting-system, starting up sterilizer system, extractable tray holder. Air cooled unit. Right hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg. 150 from +9°C to +3°C / kg.100 from +9°C to -18°C. Output per cycle according to EN17032 170 kg from +65/+10°C and 110 kg from +65/-18°. Equipped with core temperature probe. Suitable for trolley 1xMKS 202, 1xMCT202I or 2xMCT20II not delivered as standard supply.



RANGE

Roll in rapid blast chillers

CODE


RF42TMAEEGJ3I2ACIA

MODEL

MSTP202

ITEM

Programmable roll in pass through blast chiller mixed temperatures 20xGN 2/1 prepared for remote air cooled unit

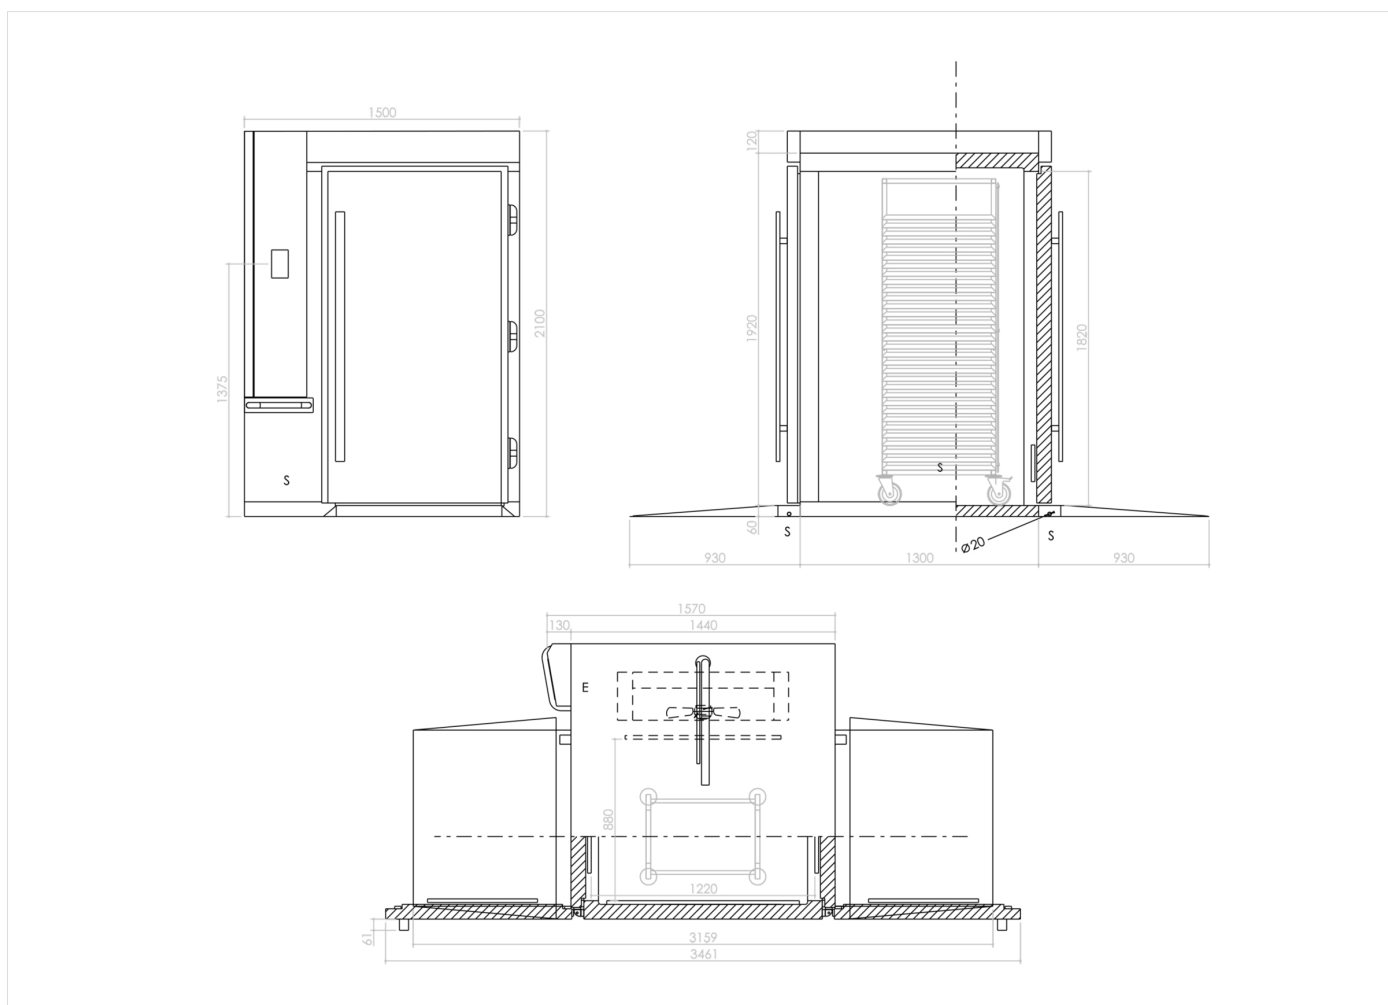

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: 380-420 3N 50 Hz

(S): Drain Connection

