

RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOI560	FT74ELG#	Griddles - Mild Steel Plate

ITEM

Electric griddle top with smooth plate on open stand



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOI560	FT74ELG#	Griddles - Mild Steel Plate

ITEM

**Electric griddle top with smooth plate on open stand**



**TECHNICAL SPECIFICATIONS**

WIDTH (mm):	400
DEPTH (mm):	750
HEIGHT (mm):	900
WEIGHT (Kg):	65
VOLUME (m <sup>3</sup> ):	0.4
EL. POWER (kW):	5.4
VOLTAGE:	VAC400-3N
INTERNAL BASE UNIT DIM. (mm):	360x400(h)x700 mm
COOKING ZONES N°:	1
COOKING ZONES DIM. (mm):	335x530 mm
COOKING ZONE DETAILS:	1x 5,4 kW
PRODUCT SPECIFICATIONS:	Smooth Mild Steel Plate
IP GRADE:	IPX5
TEMP. RANGE (°C):	0-280 °C

**DESCRIPTION**


Freestanding electric griddle on open cabinet base, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with sloping smooth hotplate. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 40 mm drain hole for fat. Grease collection tub with 1.5 litre capacity. Heating by means of armoured elements in Incoloy. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Cooking temperature thermostatically controlled, with adjustment from 110 to 280 °C. Safety thermostat trips in the event of working thermostat malfunction. Cooking surface 335x530 mm. Scraper supplied for smooth hotplate. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOI56O	FT74ELG#	Griddles - Mild Steel Plate

ITEM

Electric griddle top with smooth plate on open stand

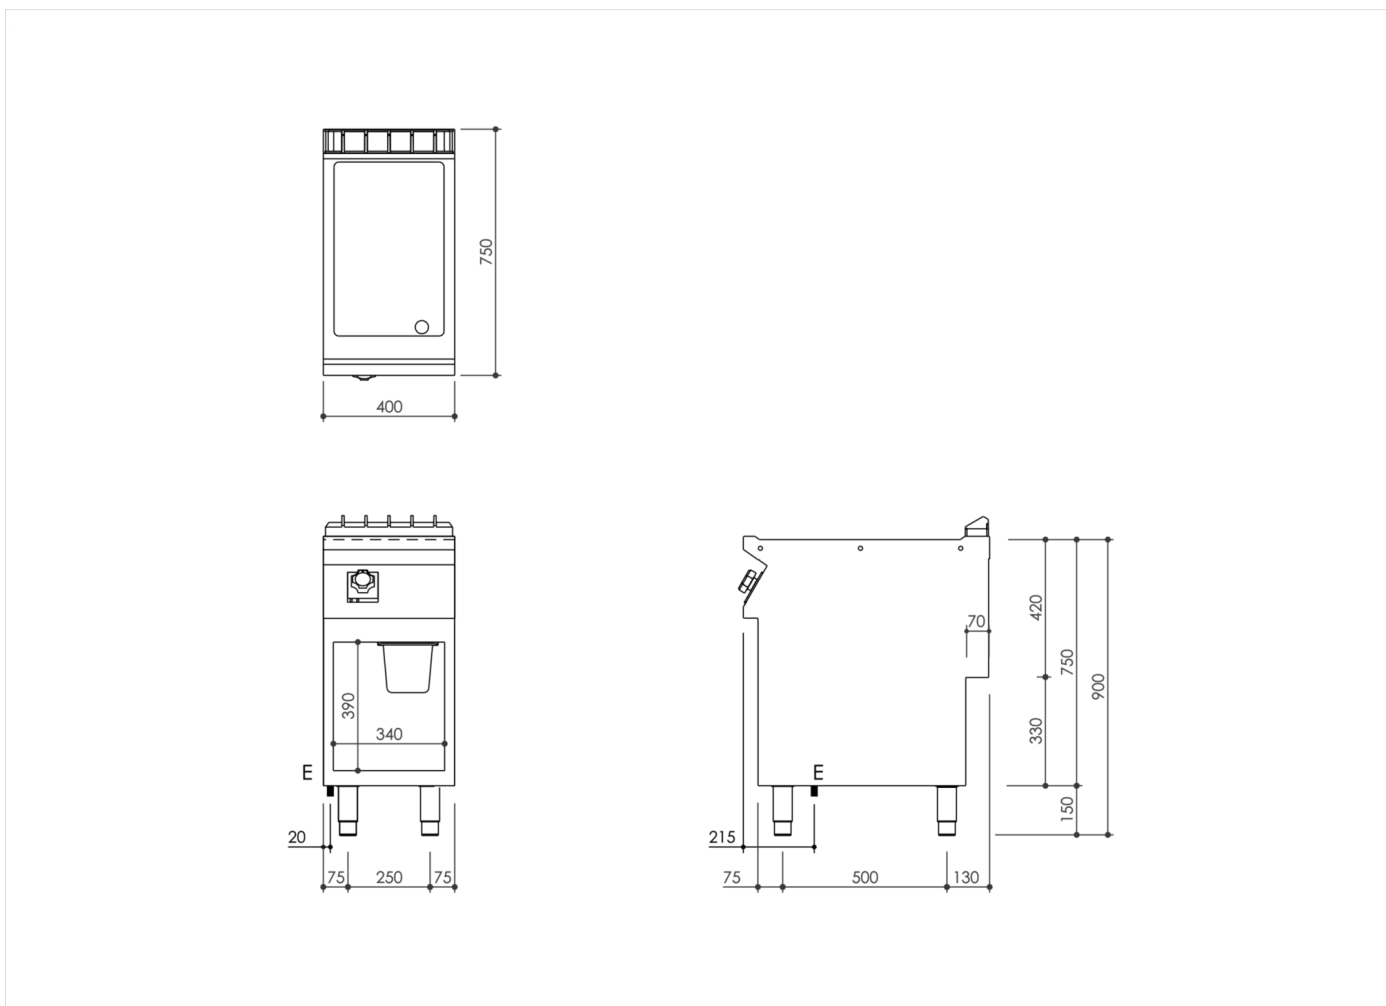

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection: VAC400-3N 50/60 Hz

