

| RANGE | CODE | MODEL | FUNCTION |
|----------|-------------|-----------|--------------------|
| MI - IIO | MACROOOO850 | BRT3PBTSP | Refrigerated Bases |

ITEM

3 door chilled counter -15-20°C without worktop



| | | | |
|----------|-------------|-----------|--------------------|
| RANGE | CODE | MODEL | FUNCTION |
| MI - IIO | MACROOOO85O | BRT3PBTSP | Refrigerated Bases |

ITEM

3 door chilled counter -15-20°C without worktop



TECHNICAL SPECIFICATIONS

| | |
|---------------------------|-------------------------|
| WIDTH (mm): | 1600 |
| DEPTH (mm): | 650 |
| HEIGHT (mm): | 610 |
| WEIGHT (Kg): | 158 |
| VOLUME (m ³): | 0.92 |
| EL. POWER (kW): | 0.5 |
| VOLTAGE: | VAC230 |
| TEMP. RANGE (°C): | -10/-20 |
| ENERGY CLASS: D | GAS TYPE: R290/3 |

DESCRIPTION


Refrigerated cupboard (-15-20°C) without worktop for countertop installation of MI 60, 70, 90 and IIO series cooking elements. 3 doors. AISI 304 stainless steel, monocoque structure. Energy efficiency class D. Insulation thickness 50 mm (CFC and HCFC free). Ventilated refrigeration. Automatic defrosting. Defrosting water evaporation. Removable condensing unit. R290 refrigerant gas. Reversible door. Tool-free easy-to-replace magnetic seal. Bottom with radiused corners. Corrosion-resistant evaporator. Height adjustable feet. Standard supply: 1 GN I/I grille per door. Digital remote control thermostat.



| RANGE | CODE | MODEL | FUNCTION |
|----------|-------------|-----------|--------------------|
| MI - IIO | MACROOOO850 | BRT3PBTSP | Refrigerated Bases |

ITEM

3 door chilled counter -15-20°C without worktop

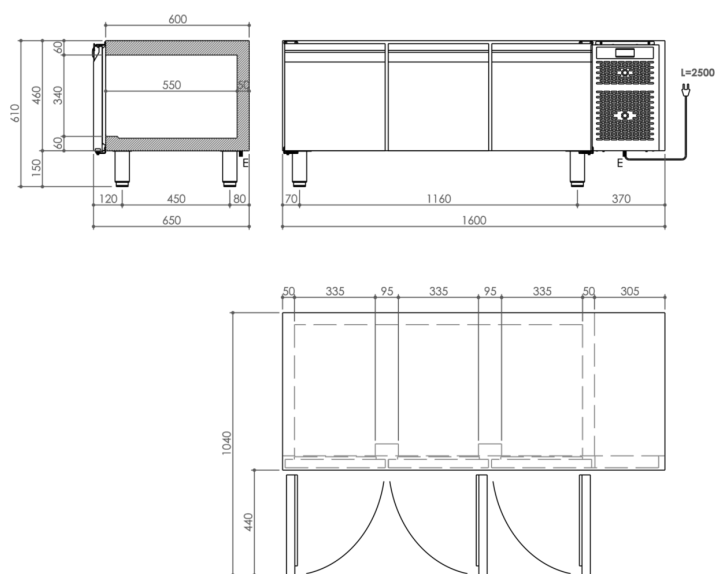

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **VAC230 50Hz**

