

| RANGE   | CODE        | MODEL    | FUNCTION         |
|---------|-------------|----------|------------------|
| MI - 90 | MAMCOOIO850 | CI98EFEV | Induction Ranges |

ITEM

**4 zone induction top on fan assisted electric oven**



| RANGE   | CODE        | MODEL    | FUNCTION         |
|---------|-------------|----------|------------------|
| MI - 90 | MAMCOOIO850 | CI98EFEV | Induction Ranges |

#### ITEM

**4 zone induction top on fan assisted electric oven**



#### TECHNICAL SPECIFICATIONS

|                           |                   |
|---------------------------|-------------------|
| WIDTH (mm):               | 800               |
| DEPTH (mm):               | 920               |
| HEIGHT (mm):              | 900               |
| WEIGHT (Kg):              | 125               |
| VOLUME (m <sup>3</sup> ): | 1                 |
| EL. POWER (kW):           | 26                |
| VOLTAGE:                  | VAC400-3          |
| INTERNAL OVEN DIM. (mm):  | 575x700x300(h) mm |
| OVEN CAPACITY:            | 2x GN 2/1         |
| OVEN POWER (kW):          | 6                 |
| COOKING ZONES N°:         | 4                 |
| COOKING ZONES DIM. (mm):  | 4x Ø280mm         |
| COOKING ZONE DETAILS:     | 4x 5kW            |
| IP GRADE:                 | IPX5              |
| OVEN TEMP. RANGE (°C):    | 110-280           |

#### DESCRIPTION


Freestanding induction boiling top, on fan-assisted electric oven, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 4 independent cooking zones, fixed to the front of the worktop, each with underlying 5 kW Ø 280 mm round inductors. Pan detection system that activates heating when cooking receptacle is present. The cooking zones are identified by screen printed markings and equipped with residual heat indicators. IO-position energy selector for heat control with shape designed to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Fan-assisted electric oven supplied with GN 2/1 grids. Oven heated by independently controlled top and bottom heating elements. Thermostat for temperature control from 110°C to 280°C. Ergonomic knobs shaped to prevent water infiltration, with integral indicator lights for instant recognition of operation, the temperature reached, and safety thermostat trip condition. Stainless steel oven chamber, dimensions 575x700x300h mm. Oven power 6 kW. Heavy gauge enamelled steel oven bottom. Pressed stainless steel oven inner door with labyrinth seal. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



| RANGE   | CODE        | MODEL    | FUNCTION         |
|---------|-------------|----------|------------------|
| MI - 90 | MAMCOOIO850 | CI98EFEV | Induction Ranges |

#### ITEM

**4 zone induction top on fan assisted electric oven**

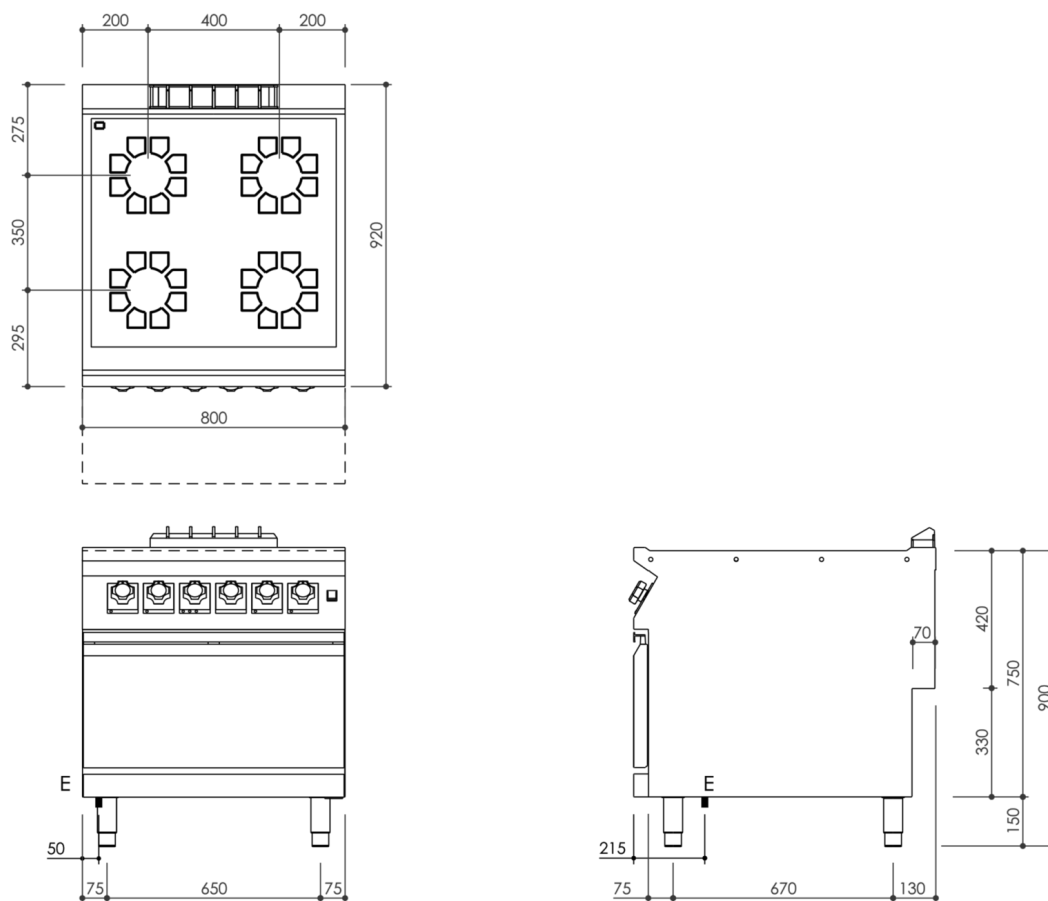

#### INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **VAC400-3 50 / 60 Hz**

