

RANGE CODE

MODEL FUNCTION

MI - 70 MAMCOOO0480

CI74EG7 Induction Ranges

ITEM

2 zone induction top on open stand





RANGE CODE

MODEL FUNCTION

MI - 70

MAMC0000480

CI74EG7 Induction Ranges

**ITEM** 

## 2 zone induction top on open stand



#### **TECHNICAL SPECIFICATIONS**

DEPTH (mm):       750         HEIGHT (mm):       900         WEIGHT (Kg):       42         VOLUME (m³):       0.4         EL. POWER (kW):       7         VOLTAGE:       VAC400-3         INTERNAL BASE UNIT DIM. (mm):       360x400(h)x700 mm         COOKING ZONES N°:       2         COOKING ZONES DIM. (mm):       2x Ø 230mm	WIDTH (mm):	400
WEIGHT (Kg):       42         VOLUME (m³):       0.4         EL. POWER (kW):       7         VOLTAGE:       VAC400-3         INTERNAL BASE UNIT DIM. (mm):       360x400(h)x700 mm         COOKING ZONES N°:       2	DEPTH (mm):	750
VOLUME (m³):       0.4         EL. POWER (kW):       7         VOLTAGE:       VAC400-3         INTERNAL BASE UNIT DIM. (mm):       360x400(h)x700 mm         COOKING ZONES N°:       2	HEIGHT (mm):	900
EL. POWER (kW): 7  VOLTAGE: VAC400-3  INTERNAL BASE UNIT DIM. (mm): 360x400(h)x700 mm  COOKING ZONES N°: 2	WEIGHT (Kg):	42
VOLTAGE: VAC400-3  INTERNAL BASE UNIT DIM. (mm): COOKING ZONES N°:  2	VOLUME (m <sup>3</sup> ):	0.4
INTERNAL BASE UNIT DIM. (mm): 360x400(h)x700 mm  COOKING ZONES N°: 2	EL. POWER (kW):	7
COOKING ZONES N°: 2	VOLTAGE:	VAC400-3
	INTERNAL BASE UNIT DIM. (mm):	360x400(h)x700 mm
COOKING ZONES DIM. (mm): 2x Ø 230mm	COOKING ZONES N°:	2
• • •	COOKING ZONES DIM. (mm):	2x Ø 230mm
IP GRADE: IPX5	IP GRADE:	IPX5

### DESCRIPTION

Freestanding induction boiling top, on open cabinet base, in AISI 3O4 stainless steel. 2O/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 2 independent cooking zones, each with underlying  $3.5 \text{ kW} \ \emptyset \ 23O \text{ mm}$  round inductors. Pan detection system that activates heating when cooking receptacle is present. The cooking zones are identified by screen printed markings and equipped with residual heat indicators. IO-position energy selector for heat control with shape designed to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Integral power-box complete with main safety sensor. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.





RANGE CODE

MODEL

**FUNCTION** 

MI - 70


MAMCOOO0480

CI74EG7

**Induction Ranges** 

**ITEM** 

# 2 zone induction top on open stand

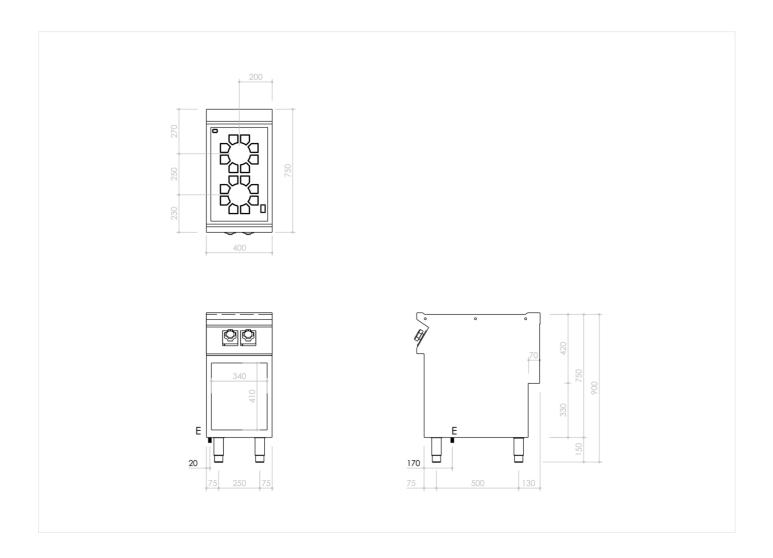

### **INSTALLATION SPECIFICATIONS**

(E) Electrical Connection: VAC400-3 50/60Hz

