

RANGE	CODE	MODEL	FUNCTION
MI - 110	MAMCOO11070	PLI18EG	Plancha 2-in-1

ITEM

Pass through electric plancha 2-in-1 top on open stand



RANGE	CODE	MODEL	FUNCTION
MI - 110	MAMCOO11070	PLI18EG	Plancha 2-in-1

ITEM

**Pass through electric plancha 2-in-1 top on open stand**



**TECHNICAL SPECIFICATIONS**

WIDTH (mm):	800
DEPTH (mm):	1100
HEIGHT (mm):	900
WEIGHT (Kg):	112
VOLUME (m <sup>3</sup> ):	0.99
EL. POWER (kW):	16
VOLTAGE:	VAC400 3N
INTERNAL BASE UNIT DIM. (mm):	740x1000x390(h)
COOKING ZONES N°:	4
COOKING ZONES DIM. (mm):	830x660
COOKING ZONE DETAILS:	4 x 4 kW
IP GRADE:	IPX5
TEMP. RANGE (°C):	50-300

**DESCRIPTION**


Pass-through, freestanding electric hotplate on open cabinet base for direct and indirect cooking. 20/10 gauge worktop. Hotplate made of stainless steel with hardened chrome contact surface: maintains heat and reduces heat loss in the environment with considerable energy saving. Hotplate with radiused corners and bevelled upper edge, size of cooking area 830x660 mm, thickness 18 mm, flush with top. 4 independent cooking zones with 4 kW output, dimensions 410x320 mm. Thermostatic temperature control for direct cooking from 50 to 280°C, for indirect cooking from 50 to 350°C. Heating control knob shaped to prevent water infiltration, equipped with integral indicator light for instant recognition of heating and correct operation of the appliance. Indicator lights showing activation of heating and correct appliance operation. Different temperatures can be set for different heating zones, and pans can be shifted from one to another to obtain better cooking, while certain foods can be cooked directly on the cooking surface. Appliance equipped with a large perimeter channel, hole for fat run-off and a grease collection drawer. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - IIO	MAMCOO11070	PLI18EG	Plancha 2-in-1

ITEM

Pass through electric plancha 2-in-1 top on open stand

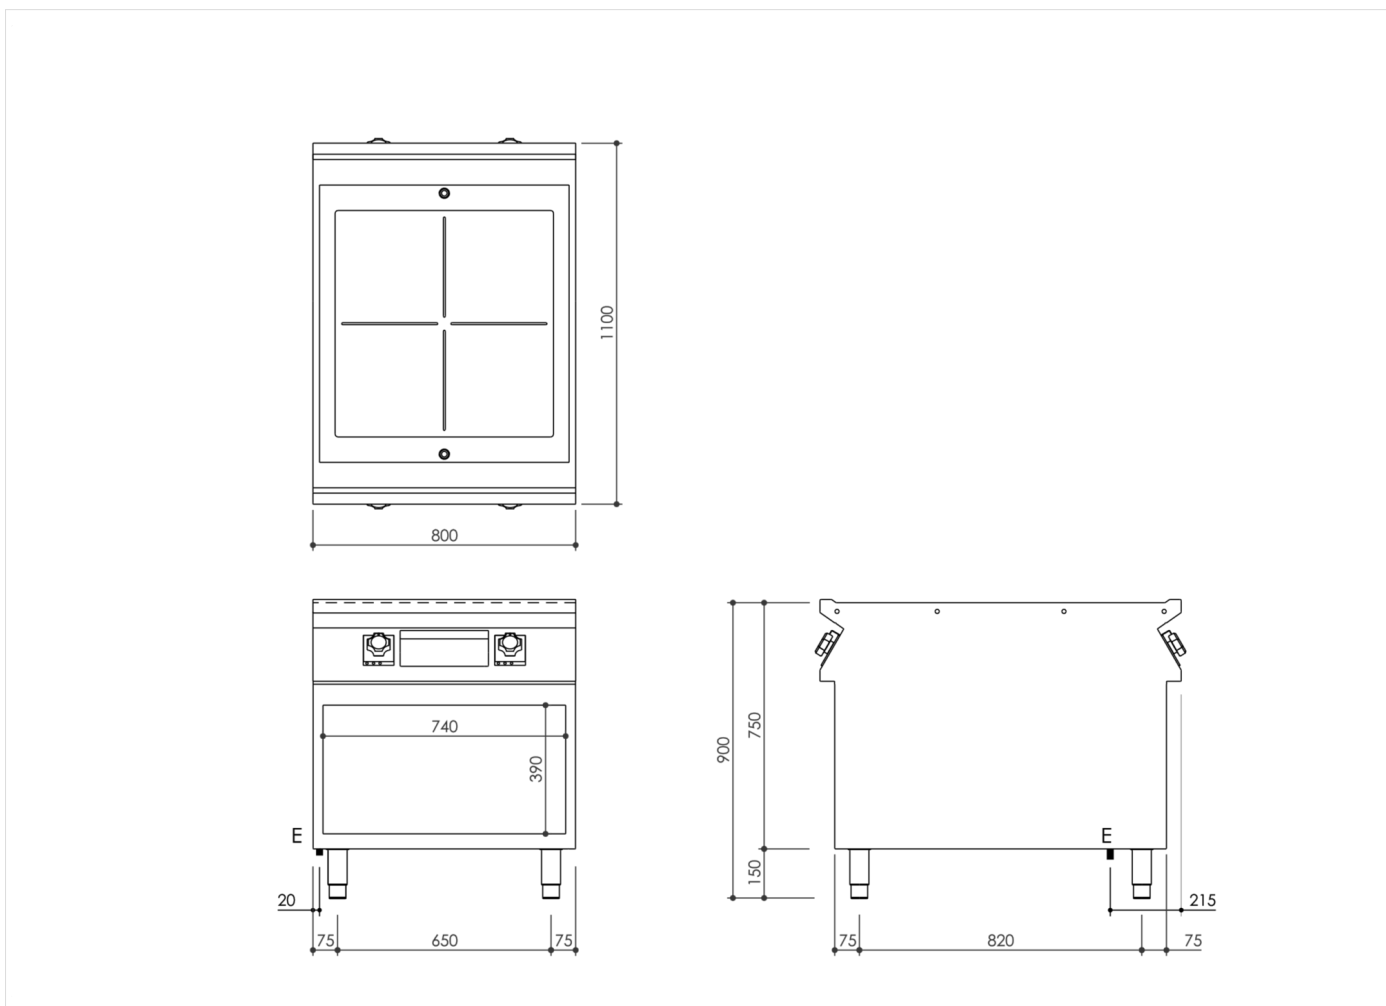

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection: VAC400 3N 50/60Hz

