MARENO
kitchen solutions since 1922

RANGE	CODE	MODEL	FUNCTION
M1 - 110	**MAMCOO11310**	**FT114ELCT**	**Griddle**

ITEM

Electric griddle top with smooth chromed plate

MARENO
kitchen solutions since 1922

RANGE	CODE	MODEL	FUNCTION
M1 - 110	**MAMC0011310**	**FT114ELCT**	**Griddle**

ITEM

Electric griddle top with smooth chromed plate

TECHNICAL SPECIFICATIONS

WIDTH (mm):	**400**
DEPTH (mm):	**1100**
HEIGHT (mm):	**250**
WEIGHT (Kg):	**55**
VOLUME (m^3):	**0.25**
EL. POWER (kW):	**7.5**
VOLTAGE:	**VAC400-3N**
COOKING ZONES N°:	**1**
COOKING ZONES DIM. (mm):	**335x700mm**
COOKING ZONE DETAILS:	**1x 7.50**
PRODUCT SPECIFICATIONS:	**Smooth Chromed Plate**
IP GRADE:	**IPX5**
TEMP. RANGE (°C):	**110-280**

DESCRIPTION

Electric griddle in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Cooking surface with smooth mirror-polished chrome hotplate. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 40 mm drain hole for fat. Grease collection tub with 1.5 litre capacity. Heating by means of armoured elements in Incoloy. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Cooking temperature thermostatically controlled, with adjustment from 110 to 280 °C. Safety thermostat trips in the event of working thermostat malfunction. Cooking surface 335x700 mm. Scraper supplied for smooth hotplate. The product complies with EC regulation 1935/2004 and Italian ministerial decree 21/03/1973 (Materials and Objects intended to come into contact with Food) MOCA. IPX5 water-resistant rating.

MARENO
kitchen solutions since 1922

RANGE	CODE	MODEL	FUNCTION
MI - 110	**MAMCOO1131O**	**FT114ELCT**	**Griddle**

ITEM

Electric griddle top with smooth chromed plate

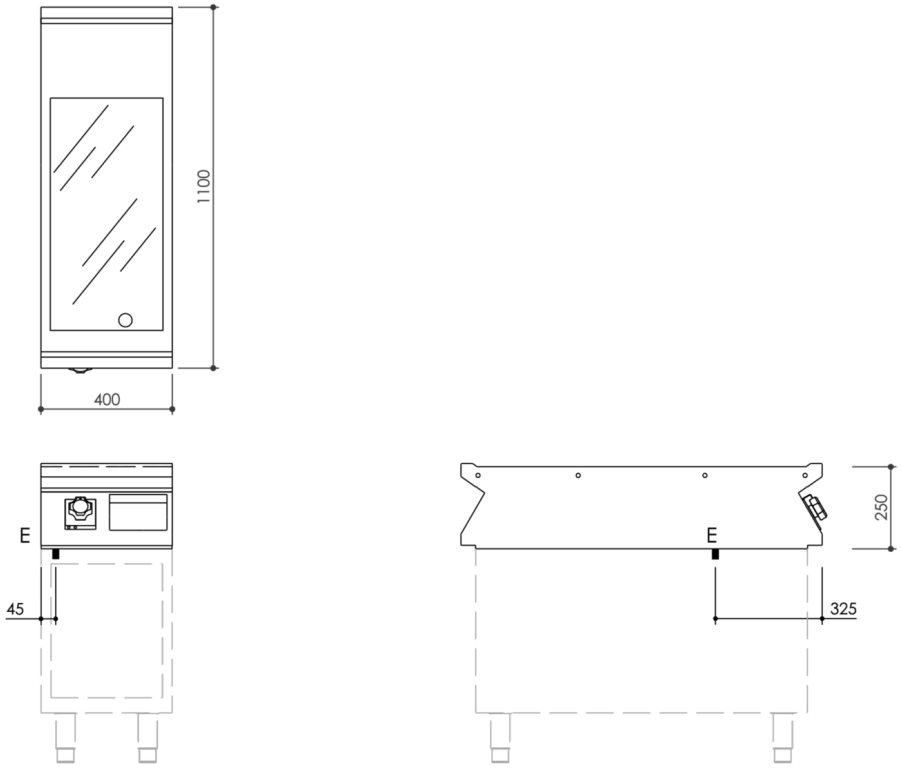

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	VAC400-3N 50/60Hz