MARENO
kitchen solutions since 1922

RANGE	CODE	MODEL	FUNCTION
M1 - 70	**MAMC0014030**	**C178EG10**	**Induction Ranges**

ITEM

4 zone induction top on open stand

MARENO ALI Group Srl Società a Socio Unico:
Via Conti Agosti , 231 - 31010 Mareno di Piave (TV)
Capitale Sociale 50.000.000,00 i.v.

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice.

LAST UPDATE:
13/10/2026

MARENO
kitchen solutions since 1922

RANGE	CODE	MODEL	FUNCTION
M1 - 70	**MAMC0014030**	**CI78EG10**	**Induction Ranges**

ITEM

4 zone induction top on open stand

TECHNICAL SPECIFICATIONS

WIDTH (mm):	**800**
DEPTH (mm):	**750**
HEIGHT (mm):	**900**
WEIGHT (Kg):	**70**
VOLUME (m^3):	**0.8**
EL. POWER (kW):	**10**
VOLTAGE:	**VAC400-3**
INTERNAL BASE UNIT DIM. (mm):	**720x400(h)x700 mm**
COOKING ZONES N°:	**4**
COOKING ZONES DIM. (mm):	**4x Ø 230mm**
COOKING ZONE DETAILS:	**4x 2,5kW**
IP GRADE:	**IPX5**

DESCRIPTION

Freestanding induction boiling top, on open cabinet base, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 4 independent cooking zones, each with underlying 2,5 kW Ø 230 mm round inductors. Pan detection system that activates heating when cooking receptacle is present. The cooking zones are identified by screen printed markings and equipped with residual heat indicators. 10-position energy selector for heat control with shape designed to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Integral power-box complete with main safety sensor. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.

MARENO
kitchen solutions since 1922

RANGE	CODE	MODEL	FUNCTION
MI - 70	**MAMC0014030**	**CI78EG10**	**Induction Ranges**

ITEM

4 zone induction top on open stand

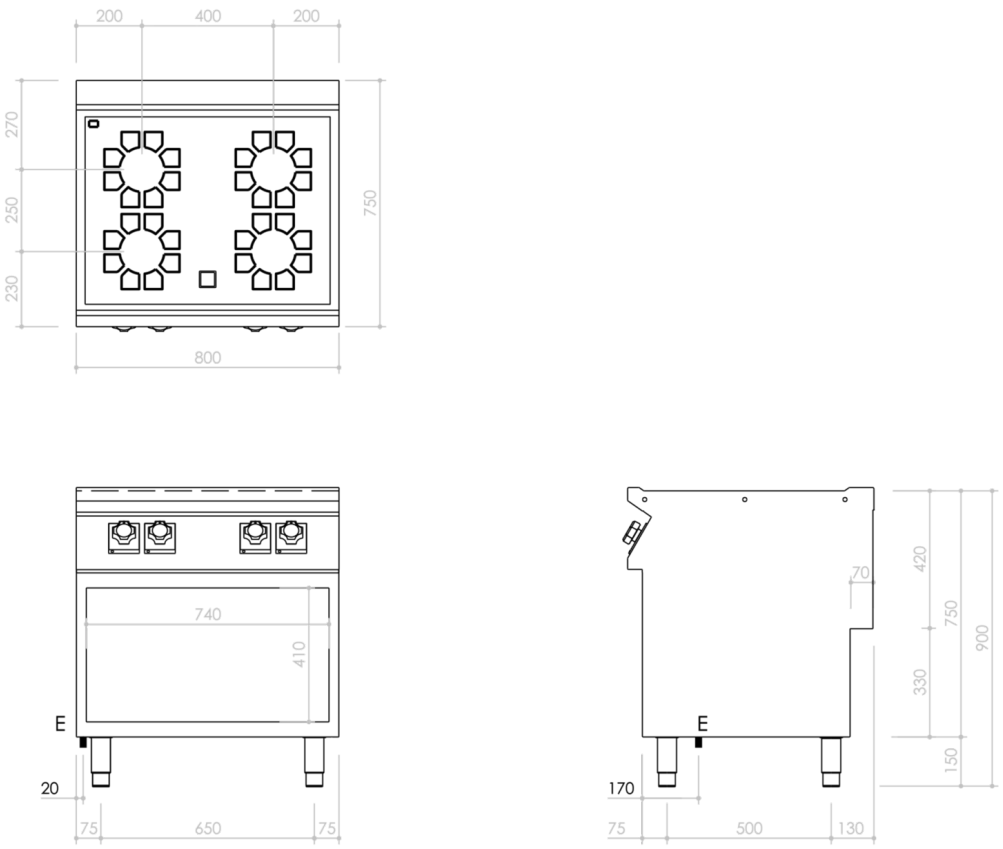

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	VAC400-3 50/60Hz