

| MI - 90 | MAMCOOO3050 | PC912GFG | Gas Ranges |
|---------|-------------|----------|------------|
| RANGE | CODE | MODEL | FUNCTION |

ITEM

6 gas burner gas oven range



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: **30/4/2024**



| MI - 90 | MAMC0003050 | PC912GFG | Gas Ranges |
|---------|-------------|----------|------------|
| RANGE | CODE | MODEL | FUNCTION |

ITEM

6 gas burner gas oven range



TECHNICAL SPECIFICATIONS WIDTH (mm): 1200 DEPTH (mm): 920 HEIGHT (mm): 900 WEIGHT (Ka): 200 VOLUME (m³): 1.5 GAS POWER (kW): 56 570x490x295(h) mm INTERNAL OVEN DIM. (mm): OVEN CAPACITY: 2x GN 2/1 OVEN POWER (kW): 8 COOKING ZONES N°: 6 OVEN TEMP. RANGE (°C): 0-300

DESCRIPTION

Freestanding gas boiling top on gas oven in AISI 3O4 stainless steel. 20/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Appliance comprising 6 main burners hermetically sealed to the top, 3 of which with maximum output of 6 kW, 3 with IO kW output. Ergonomic knobs shaped to prevent water infiltration. Output control from 1.6 to 6 kW and from 2.5 to IO kW respectively by means of a valve with safety thermocouple. Main burner ignition by means of permanent low-energy pilot burner (I7O W). Pilot burner and thermocouple are located underneath the main burner body, protected from accidental impact and spills. Boiling top with heavy duty pan stands in RAAF enamelled cast-iron (acid, alkali and flame resistant); the pan stands are compatible with both small and large pans. GN 2/I gas oven with thermostatic control valve providing temperature adjustment from 50°C to 300°C. Stabilised flame burner complete with pilot flame with piezoelectric ignition and safety thermocouple. Stainless steel oven chamber, dimensions 575x7OOx3OOh mm. Oven power 8 kW. Heavy gauge enamelled steel oven bottom. Pressed stainless steel oven inner door with labyrinth seal. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



| MI - 90 | MAMC0003050 | PC912GFG | Gas Ranges |
|---------|-------------|----------|------------|
| RANGE | CODE | MODEL | FUNCTION |

ITEM

6 gas burner gas oven range

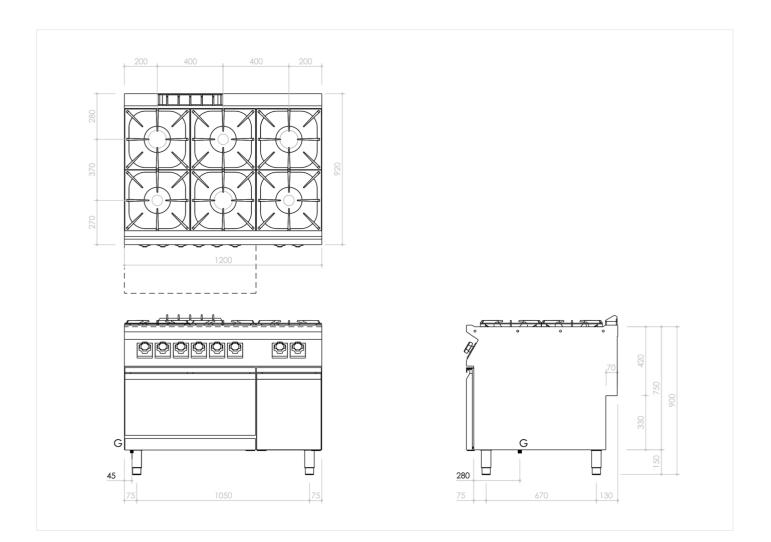

INSTALLATION SPECIFICATIONS

(G) Gas Inlet:

Ø1/2''



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: 30/4/2024