

RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMC0003020	PC98GFEV	Gas Ranges

ITEM

4 gas burner fan assisted electric oven range





The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: **30/4/2024** 



MI - 90	MAMC0003020	PC98GFEV	Gas Ranges
RANGE	CODE	MODEL	FUNCTION

ITEM

## 4 gas burner fan assisted electric oven range



### **TECHNICAL SPECIFICATIONS**

WIDTH (mm):	800
DEPTH (mm):	920
HEIGHT (mm):	900
WEIGHT (Kg):	145
VOLUME (m <sup>3</sup> ):	1
GAS POWER (kW):	32
EL. POWER (kW):	6
VOLTAGE:	VAC400-3N
INTERNAL OVEN DIM. (mm):	570x490x295(h) mm
OVEN CAPACITY:	2x GN 2/I
OVEN POWER (kW):	6
COOKING ZONES N°:	4
IP GRADE:	IPX5
OVEN TEMP. RANGE (°C):	0-280

### DESCRIPTION

Freestanding gas boiling top on ventilated electric oven in AISI 3O4 stainless steel. 2O/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Appliance comprising 4 main burners hermetically sealed to the top, 2 of which with maximum output of 6 kW and 2 with output of IO kW. Ergonomic knobs shaped to prevent water infiltration. Output control from I.6 to 6 kW and from 2.5 to IO kW respectively, by means of a valve with safety thermocouple. Main burner ignition by means of permanent low-energy pilot burner (I7O W). Pilot burner and thermocouple are located underneath the main burner body, protected from accidental impact and spills. Boiling top with heavy duty pan stands in RAAF enamelled cast-iron (acid, alkali and flame resistant); the pan stands are compatible with both small and large pans. Electric GN 2/I ventilated oven. Oven heated by independently controlled top and bottom heating elements. Thermostat for temperature control from IIO°C to 280°C. Ergonomic knobs shaped to prevent water infiltration, with integral indicator lights for instant recognition of operation, the temperature reached, and safety thermostat trip condition. Stainless steel oven chamber, dimensions 575x7OOx3OOh mm. Oven power 6 kW. Heavy gauge enamelled steel oven bottom. Pressed stainless steel oven inner door with labyrinth seal. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



MI - 90	MAMC0003020	PC98GFEV	Gas Ranges
RANGE	CODE	MODEL	FUNCTION

ITEM

# 4 gas burner fan assisted electric oven range

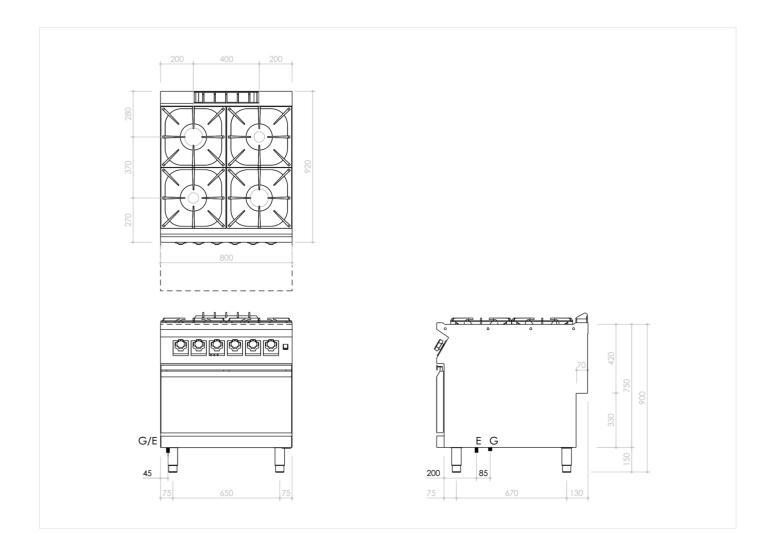

#### INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

(G) Gas Inlet:

VAC400-3N 50/60Hz Øl/2''



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: 30/4/2024