

RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO3O2O	PC98GFEV	Gas Ranges

ITEM

4 gas burner fan assisted electric oven range



RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO3O2O	PC98GFEV	Gas Ranges

ITEM

4 gas burner fan assisted electric oven range



TECHNICAL SPECIFICATIONS

WIDTH (mm):	800
DEPTH (mm):	920
HEIGHT (mm):	900
WEIGHT (Kg):	145
VOLUME (m ³):	1
GAS POWER (kW):	32
EL. POWER (kW):	6
VOLTAGE:	VAC400-3N
INTERNAL OVEN DIM. (mm):	575x700x300(h) mm
OVEN CAPACITY:	2x GN 2/1
OVEN POWER (kW):	6
COOKING ZONES N°:	4
COOKING ZONE DETAILS:	2x 6kW 2x 10kW
IP GRADE:	IPX5
OVEN TEMP. RANGE (°C):	0-280

DESCRIPTION


Freestanding gas boiling top on ventilated electric oven in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Appliance comprising 4 main burners hermetically sealed to the top, 2 of which with maximum output of 6 kW and 2 with output of 10 kW. Ergonomic knobs shaped to prevent water infiltration. Output control from 1.6 to 6 kW and from 2.5 to 10 kW respectively, by means of a valve with safety thermocouple. Main burner ignition by means of permanent low-energy pilot burner (170 W). Pilot burner and thermocouple are located underneath the main burner body, protected from accidental impact and spills. Boiling top with heavy duty pan stands in RAAF enamelled cast-iron (acid, alkali and flame resistant); the pan stands are compatible with both small and large pans. Electric GN 2/1 ventilated oven. Oven heated by independently controlled top and bottom heating elements. Thermostat for temperature control from 110°C to 280°C. Ergonomic knobs shaped to prevent water infiltration, with integral indicator lights for instant recognition of operation, the temperature reached, and safety thermostat trip condition. Stainless steel oven chamber, dimensions 575x700x300h mm. Oven power 6 kW. Heavy gauge enamelled steel oven bottom. Pressed stainless steel oven inner door with labyrinth seal. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO3O2O	PC98GFEV	Gas Ranges

ITEM

4 gas burner fan assisted electric oven range

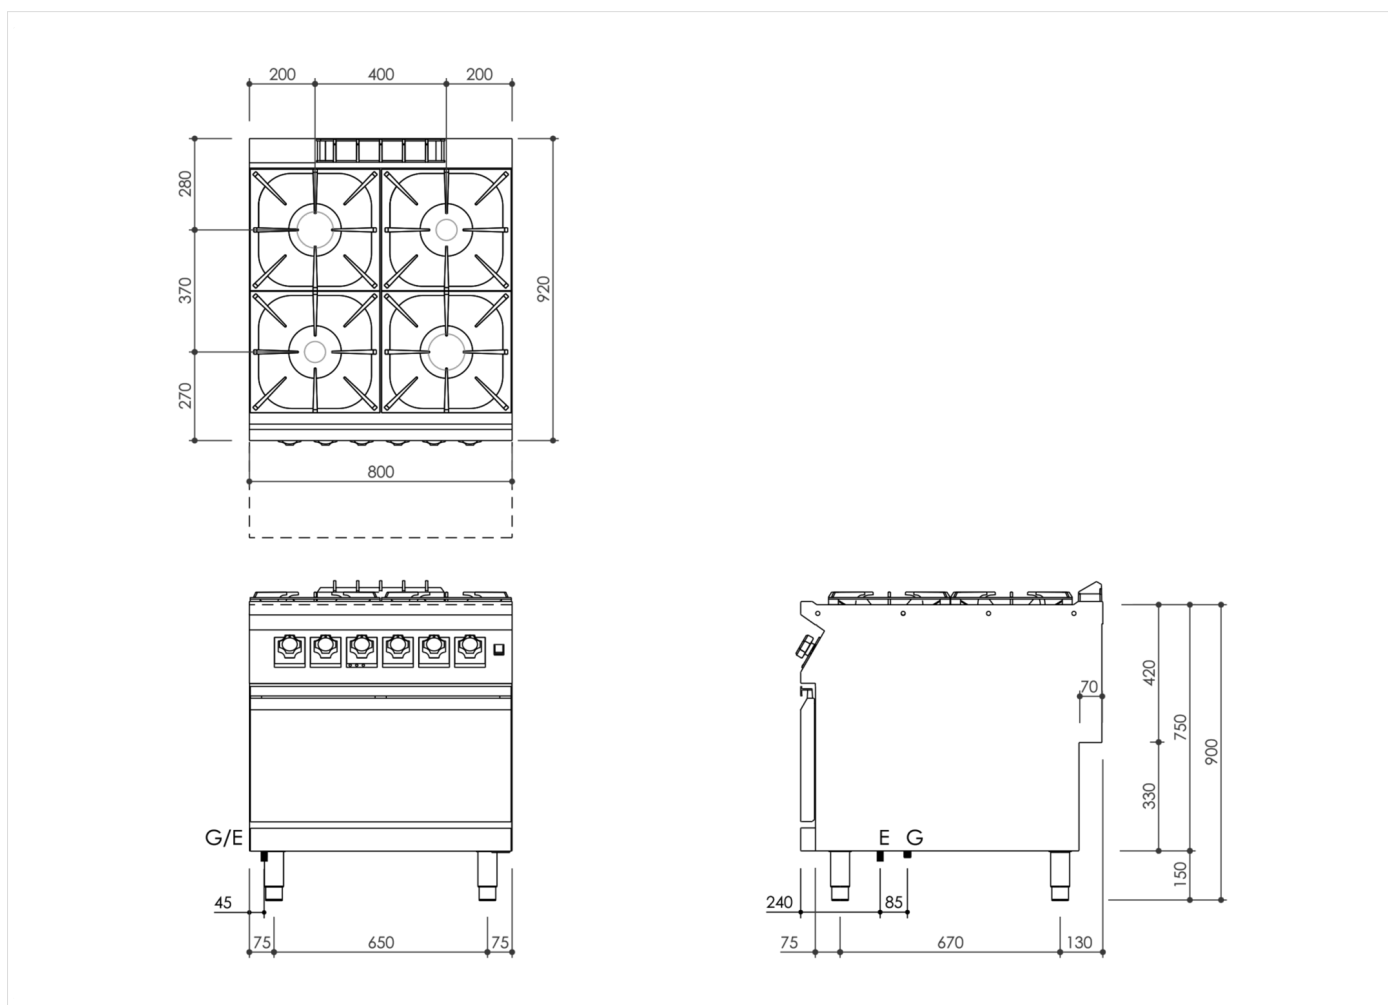

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	VAC400-3N 50/60Hz
(G) Gas Inlet:	Ø1/2"

