

| RANGE   | CODE        | MODEL    | FUNCTION                   |
|---------|-------------|----------|----------------------------|
| MI - 90 | MAMCOOO3370 | CV98EFEV | <b>Glassceramic Ranges</b> |

ITEM

**4 ceramic hotplate fan assisted electric oven range**



| RANGE   | CODE        | MODEL    | FUNCTION            |
|---------|-------------|----------|---------------------|
| MI - 90 | MAMCOOO3370 | CV98EFEV | Glassceramic Ranges |

ITEM

**4 ceramic hotplate fan assisted electric oven range**



**TECHNICAL SPECIFICATIONS**

|                           |                   |
|---------------------------|-------------------|
| WIDTH (mm):               | 800               |
| DEPTH (mm):               | 920               |
| HEIGHT (mm):              | 900               |
| WEIGHT (Kg):              | 134               |
| VOLUME (m <sup>3</sup> ): | 1                 |
| EL. POWER (kW):           | 22                |
| VOLTAGE:                  | VAC400-3N         |
| INTERNAL OVEN DIM. (mm):  | 575x700x300(h) mm |
| OVEN CAPACITY:            | 2x GN 2/1         |
| OVEN POWER (kW):          | 6                 |
| COOKING ZONES N°:         | 4                 |
| COOKING ZONES DIM. (mm):  | 4x Ø 300 mm       |
| COOKING ZONE DETAILS:     | 4x 4kW            |
| IP GRADE:                 | IPX5              |
| OVEN TEMP. RANGE (°C):    | 0-280             |

**DESCRIPTION**


Freestanding glass ceramic electric boiling top, on ventilated electric oven, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 4 independent cooking zones, each with underlying 4 kW Ø 300 mm radiant elements to reach maximum temperature of 400°C in 3 min. Glass dimensions 750x700 mm. The cooking zones are marked by screen printed circles on the glass-ceramic surface and equipped with residual heat indicators. Energy regulator for heat control with shape designed to prevent water infiltration, with integral indicator lights for instant recognition of appliance operation. Hotplates equipped with automatic reset safety thermostat that trips if the appliance is switched on with an unsuitable pan or no pan at all. Electric GN 2/1 ventilated oven. Oven heated by independently controlled top and bottom heating elements. Thermostat control providing temperature adjustment from 110°C to 280°C. Oven chamber in stainless steel, dimensions 575x700x300h mm. Oven floor in cast iron. Oven inner door in stainless steel with labyrinth seal. 4-position selector switch, safety thermostat. Indicator lights indicating correct oven operation. Oven power 6 kW. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



| RANGE   | CODE        | MODEL    | FUNCTION            |
|---------|-------------|----------|---------------------|
| MI - 90 | MAMCOOO3370 | CV98EFEV | Glassceramic Ranges |

ITEM

**4 ceramic hotplate fan assisted electric oven range**

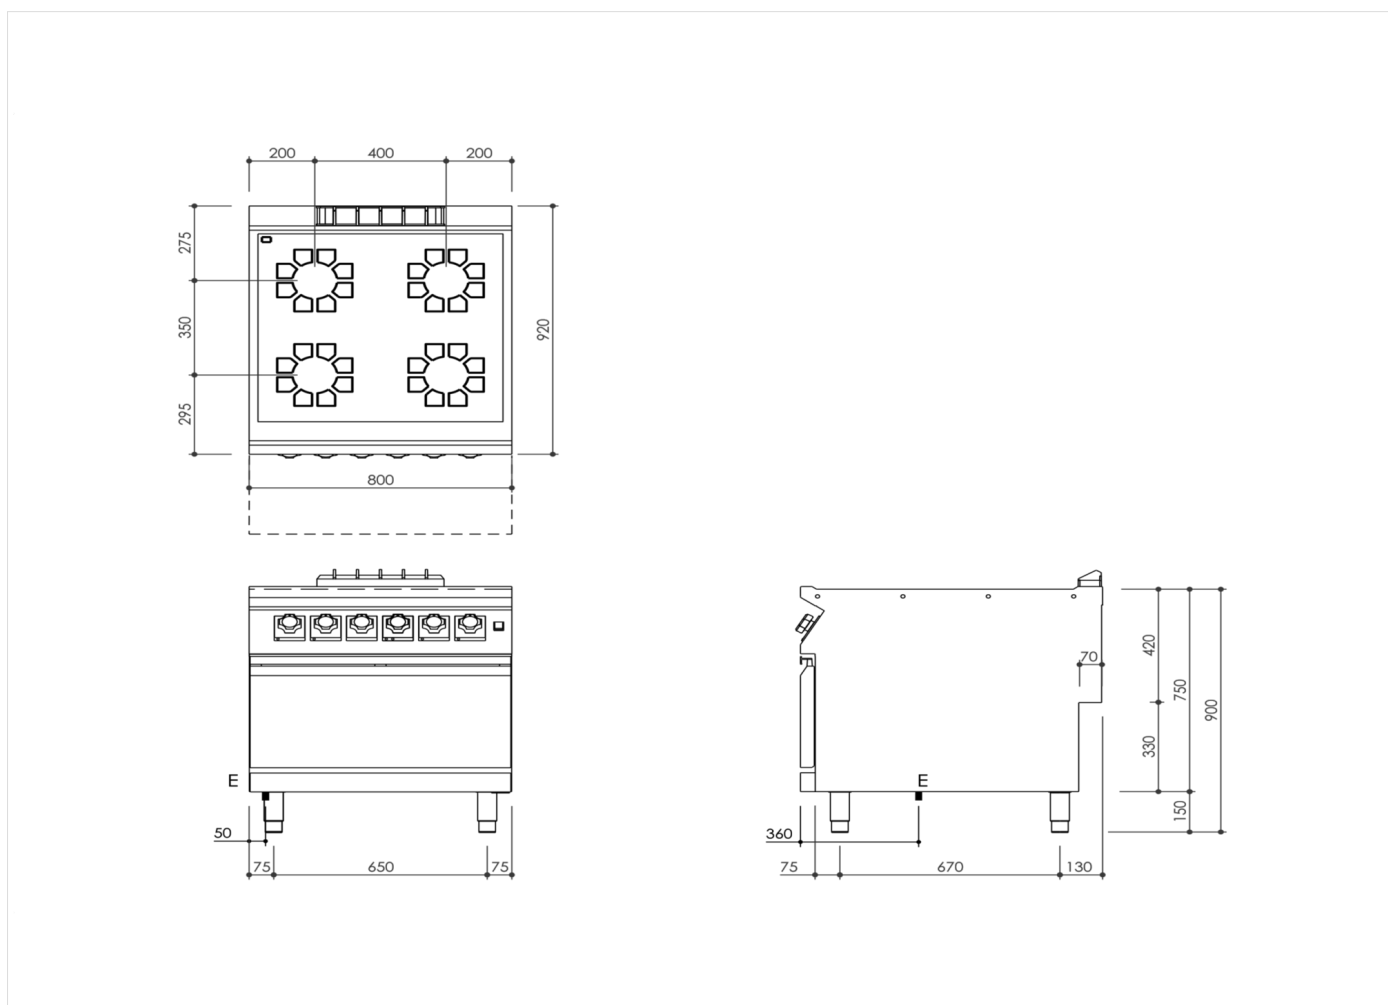

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection: **VAC400-3N 50/60Hz**

