

RANGE

CODE

MODEL

FUNCTION

MI - 90

MAMCOOO6720

FT96EMCST

Griddles

ITEM

Electric griddle top with 2/3 smooth and 1/3 ribbed chromed matt plate





RANGE CODE MODEL FUNCTION

MI - 90 MAMCOOO6720 FT96EMCST Griddles

ITEM

Electric griddle top with 2/3 smooth and 1/3 ribbed chromed matt plate



TECHNICAL SPECIFICATIONS WIDTH (mm):

WIDTH (mm):	600
DEPTH (mm):	920
HEIGHT (mm):	250
WEIGHT (Kg):	85
VOLUME (m ³):	O.25
EL. POWER (kW):	10.5
VOLTAGE:	VAC400-3N
COOKING ZONES N°:	1
COOKING ZONES DIM. (mm):	535x7OOmm
PRODUCT SPECIFICATIONS:	2/3 Smooth, 1/3 Ribbed Matt Chromed Plate
IP GRADE:	IPX5
TEMP. RANGE (°C):	110-280

DESCRIPTION

Electric griddle in AISI 3O4 stainless steel. 2O/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with ChromePlus sloping hotplate I/3 ribbed 2/3 smooth chrome finish. super-tough and easy-clean hotplate. Hotplate recessed 4O mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 4O mm drain hole for fat. Grease collection tub with I.5 litre capacity. Heating by means of armoured elements in Incoloy. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Cooking temperature thermostatically controlled, with adjustment from IIO to 28O °C. Safety thermostat trips in the event of working thermostat malfunction. Cooking surface 535x700 mm. Scraper supplied for smooth hotplate. The product complies with EC regulation 1935/2004 and Italian ministerial decree 2I/O3/1973 (Materials and Objects intended to come into contact with Food) MOCA. IPX5 water-resistant rating.





RANGE

CODE

MODEL

FUNCTION

MI - 90


MAMCOOO6720

FT96EMCST

Griddles

ITEM

Electric griddle top with 2/3 smooth and 1/3 ribbed chromed matt plate

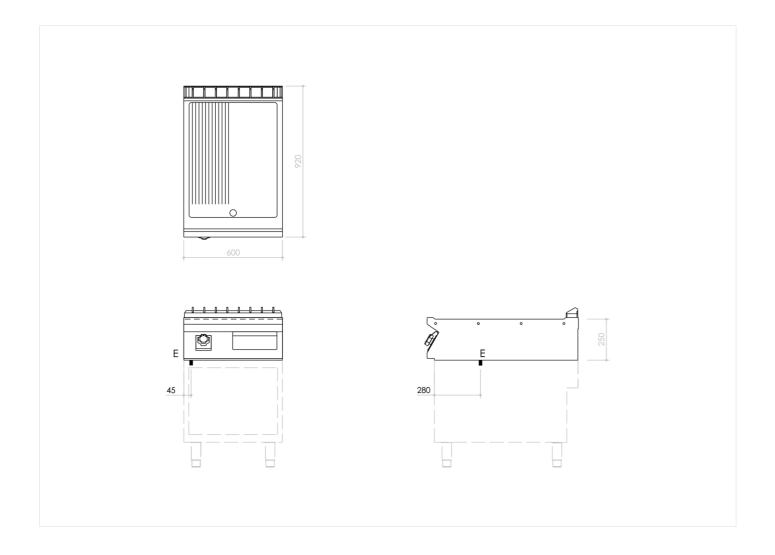

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: VAC400-3N 50/60Hz

