

| RANGE   | CODE        | MODEL    | FUNCTION |
|---------|-------------|----------|----------|
| MI - 90 | MAMCOOO3810 | FT96GLCG | Griddles |

ITEM

Gas griddle top with smooth chromed plate on open stand



|         |             |          |          |
|---------|-------------|----------|----------|
| RANGE   | CODE        | MODEL    | FUNCTION |
| MI - 90 | MAMCOOO38IO | FT96GLCG | Griddles |

ITEM

**Gas griddle top with smooth chromed plate on open stand**



**TECHNICAL SPECIFICATIONS**

|                               |                      |
|-------------------------------|----------------------|
| WIDTH (mm):                   | 600                  |
| DEPTH (mm):                   | 920                  |
| HEIGHT (mm):                  | 900                  |
| WEIGHT (Kg):                  | 102                  |
| VOLUME (m <sup>3</sup> ):     | 0.5                  |
| GAS POWER (kW):               | 14                   |
| INTERNAL BASE UNIT DIM. (mm): | 520x400(h)x900 mm    |
| COOKING ZONES N°:             | 1                    |
| COOKING ZONES DIM. (mm):      | 535x700mm            |
| COOKING ZONE DETAILS:         | 1x 14.00             |
| PRODUCT SPECIFICATIONS:       | Smooth Chromed Plate |
| TEMP. RANGE (°C):             | 90-280               |

**DESCRIPTION**


Freestanding gas griddle on open cabinet base, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with smooth mirror-polished chrome hotplate. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 40 mm drain hole for fat. Grease collection tub with 1.5 litre capacity. Heating by means of steel stabilised flame burner having 2 branches and 4 rows of flames for each zone, complete with pilot flame and safety thermocouple. Heating control knob shaped to prevent water infiltration. Gas supply controlled by thermostatic valve with safety thermocouple. Cooking temperature manually controlled from 90°C to 280°C. Automatic ignition by means of piezoelectric device with waterproof cap. Cooking surface 535x700 mm. Scraper supplied for smooth hotplate. The product complies with EC regulation 1935/2004 and Italian ministerial decree 21/03/1973 (Materials and Objects intended to come into contact with Food) MOCA. Appliance equipped with stainless steel adjustable feet.



| RANGE   | CODE        | MODEL    | FUNCTION |
|---------|-------------|----------|----------|
| MI - 90 | MAMCOOO3810 | FT96GLCG | Griddles |

ITEM

Gas griddle top with smooth chromed plate on open stand

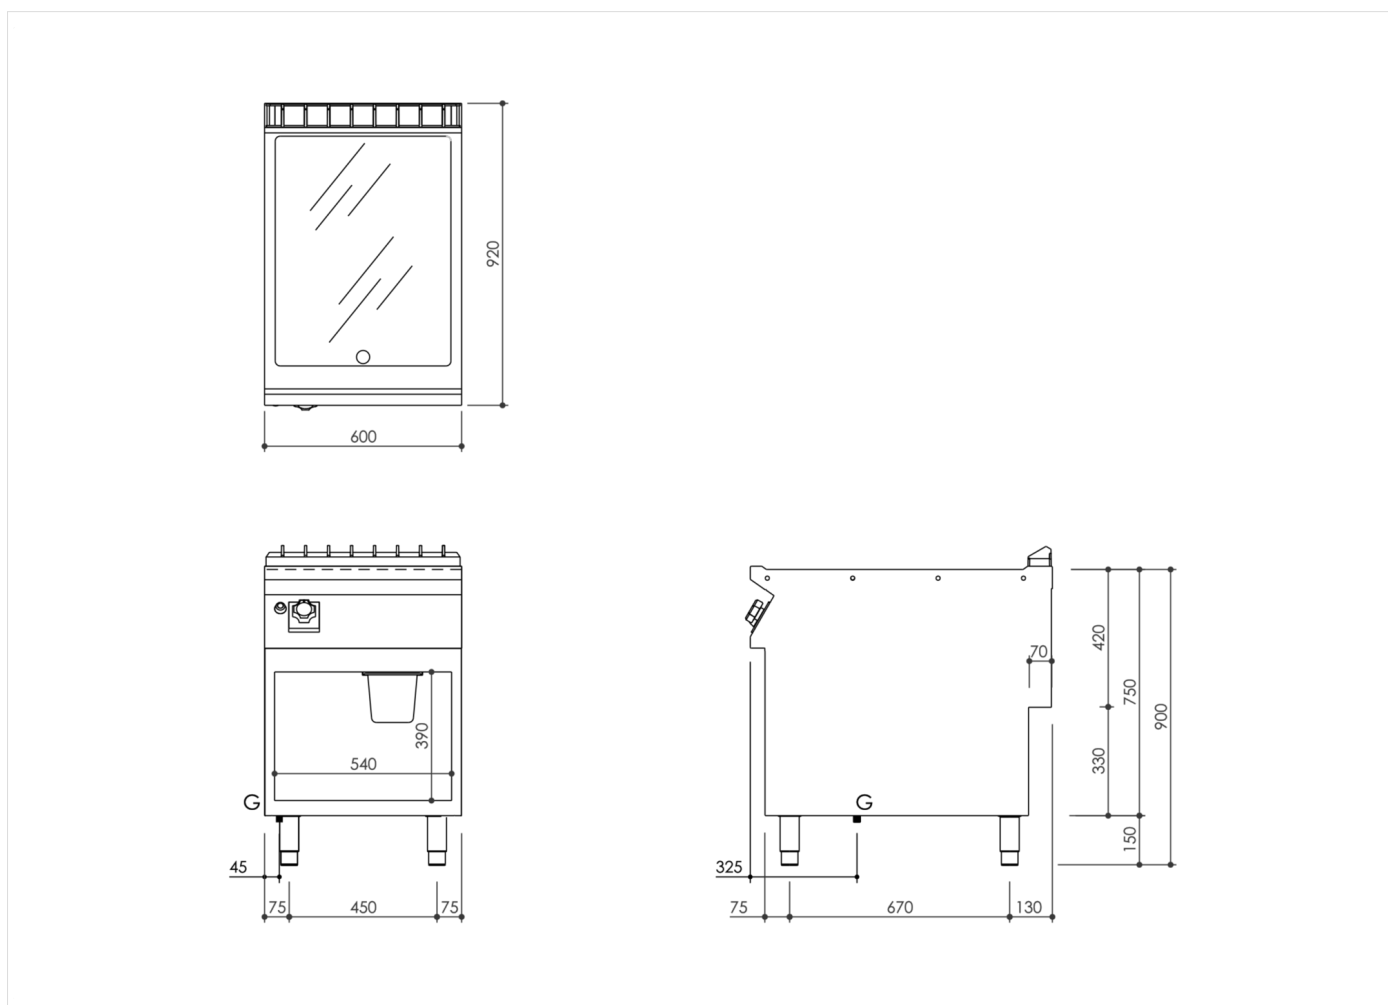

INSTALLATION SPECIFICATIONS

(G) Gas Inlet:  $\text{Ø}1/2''$

