

RANGE

CODE

MODEL

FUNCTION

MI - 90

MAMC0004490

FT912EMCG

Griddles

ITEM

Electric griddle top with 2/3 smooth and 1/3 ribbed chromed plate on open stand





RANGE CODE MODEL FUNCTION

MI - 90 MAMCOOO4490 FT912EMCG Griddles

ITEM

Electric griddle top with 2/3 smooth and 1/3 ribbed chromed plate on open stand



TECHNICAL SPECIFICATIONS

WIDTH (mm): 1200 DEPTH (mm): 920 HEIGHT (mm): 900 WEIGHT (Kg): 158 VOLUME (m³): 0.5 EL. POWER (kW): 22.5 VOLTAGE: VAC400-3N INTERNAL BASE UNIT DIM. (mm): 1080x400(h)x900 mm COOKING ZONES N°: 3 COOKING ZONES DIM. (mm): 1135x700mm PRODUCT SPECIFICATIONS: 2/3 Smooth, 1/3 Ribbed Chromed Plate IP GRADE: IPX5 TEMP. RANGE (°C): 110-280		
HEIGHT (mm): WEIGHT (Kg): VOLUME (m³): O.5 EL. POWER (kW): VOLTAGE: VAC4OO-3N INTERNAL BASE UNIT DIM. (mm): COOKING ZONES N°: COOKING ZONES DIM. (mm): PRODUCT SPECIFICATIONS: IP GRADE: POO 158 158 VAC4OO-3N 1080x4OO(h)x9OO mm 2/3 Smooth, 1/3 Ribbed Chromed Plate IPX5	WIDTH (mm):	1200
WEIGHT (Kg): VOLUME (m³): EL. POWER (kW): VOLTAGE: VAC400-3N INTERNAL BASE UNIT DIM. (mm): COOKING ZONES N°: COOKING ZONES DIM. (mm): PRODUCT SPECIFICATIONS: IP GRADE: IPSS	DEPTH (mm):	920
VOLUME (m³): EL. POWER (kW): VOLTAGE: VAC400-3N INTERNAL BASE UNIT DIM. (mm): COOKING ZONES N°: COOKING ZONES DIM. (mm): PRODUCT SPECIFICATIONS: IP GRADE: O.5 VAC400-3N IO80x400(h)x900 mm II35x700mm 2/3 Smooth, I/3 Ribbed Chromed Plate IPX5	HEIGHT (mm):	900
EL. POWER (kW): VOLTAGE: VAC400-3N INTERNAL BASE UNIT DIM. (mm): COOKING ZONES N°: COOKING ZONES DIM. (mm): PRODUCT SPECIFICATIONS: IP GRADE: 19 10 20.5 10 80x400(h)x900 mm 10 80x400(h)x900 mm 10 80x400(h)x900 mm 20 3 5 5 5 7 7 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8	WEIGHT (Kg):	158
VOLTAGE: INTERNAL BASE UNIT DIM. (mm): COOKING ZONES N°: COOKING ZONES DIM. (mm): PRODUCT SPECIFICATIONS: IP GRADE: VAC400-3N IO80x400(h)x900 mm IO80x400(h)x900 mm II35x700mm 2/3 Smooth, I/3 Ribbed Chromed Plate IPX5	VOLUME (m ³):	O.5
INTERNAL BASE UNIT DIM. (mm): COOKING ZONES N°: COOKING ZONES DIM. (mm): PRODUCT SPECIFICATIONS: IP GRADE: IP STADE: IO80x40O(h)x90O mm II35x7OOmm 2/3 Smooth, I/3 Ribbed Chromed Plate IPX5	EL. POWER (kW):	22.5
COOKING ZONES N°: COOKING ZONES DIM. (mm): II35x7OOmm PRODUCT SPECIFICATIONS: IP GRADE: IP STADE: IP STA	VOLTAGE:	VAC400-3N
COOKING ZONES DIM. (mm): PRODUCT SPECIFICATIONS: IP GRADE: IP STATE IPX5	INTERNAL BASE UNIT DIM. (mm):	1080x400(h)x900 mm
PRODUCT SPECIFICATIONS: 2/3 Smooth, 1/3 Ribbed Chromed Plate IP GRADE: IPX5	COOKING ZONES N°:	3
PRODUCT SPECIFICATIONS: Chromed Plate IP GRADE: IPX5	COOKING ZONES DIM. (mm):	1135x700mm
	PRODUCT SPECIFICATIONS:	·
TEMP. RANGE (°C): 110-280	IP GRADE:	IPX5
	TEMP. RANGE (°C):	110-280

DESCRIPTION

Freestanding electric griddle on open cabinet base, in AISI 3O4 stainless steel. 2O/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with sloping mirror-polished hotplate, I/3 ribbed 2/3 smooth. Hotplate recessed 4O mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 4O mm drain hole for fat. Fat collection GN container located in lower compartment to assist and increase the liquid collection capacity. Heating by means of armoured elements in Incoloy. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Cooking temperature thermostatically controlled, with adjustment from IIO to 28O °C. Safety thermostat trips in the event of working thermostat malfunction. Cooking surface II35x7OO mm. Scraper supplied for smooth hotplate. The product complies with EC regulation I935/2OO4 and Italian ministerial decree 2I/O3/1973 (Materials and Objects intended to come into contact with Food) MOCA. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



RANGE

CODE

MODEL

FUNCTION

MI - 90


MAMC0004490

FT912EMCG

Griddles

ITEM

Electric griddle top with 2/3 smooth and 1/3 ribbed chromed plate on open stand

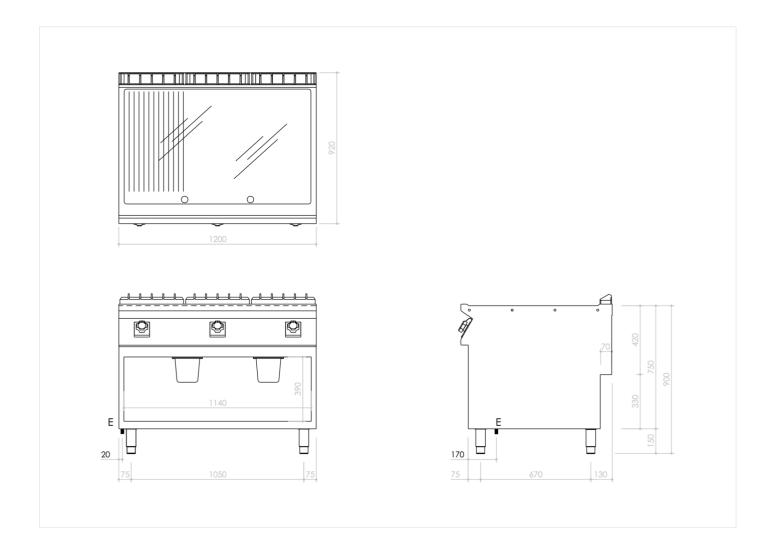

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC400-3N 50/60Hz

