

RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOIO9IO	CI78EFEVI4	Induction Ranges

ITEM

4 zone induction top on fan assisted electric oven



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOIO9IO	CI78EFEVI4	Induction Ranges

ITEM

4 zone induction top on fan assisted electric oven



TECHNICAL SPECIFICATIONS

WIDTH (mm):	800
DEPTH (mm):	750
HEIGHT (mm):	900
WEIGHT (Kg):	115
VOLUME (m ³):	0.8
EL. POWER (kW):	18.2
VOLTAGE:	VAC400-3
INTERNAL OVEN DIM. (mm):	479x580x300h
OVEN CAPACITY:	3x 530x480mm
OVEN POWER (kW):	4.2
COOKING ZONES N°:	4
COOKING ZONES DIM. (mm):	4x Ø230mm
COOKING ZONE DETAILS:	4x 3,5kW
IP GRADE:	IPX5
OVEN TEMP. RANGE (°C):	110-280

DESCRIPTION


Freestanding induction boiling top, on fan-assisted electric oven, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 4 independent cooking zones, fixed to the front of the worktop, each with underlying 3,5 kW Ø 230 mm round inductors. Pan detection system that activates heating when cooking receptacle is present. The cooking zones are identified by screen printed markings and equipped with residual heat indicators. IO-position energy selector for heat control with shape designed to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Integral power-box complete with main safety sensor. Fan-assisted electric oven supplied with 530x480 mm grids. Oven heated by independently controlled top and bottom heating elements. Thermostat for temperature control from 110°C to 280°C. Ergonomic knobs shaped to prevent water infiltration, with integral indicator lights for instant recognition of operation, the temperature reached, and safety thermostat trip condition. Stainless steel oven chamber, dimensions 479x580x300h mm. Oven power 4.2 kW. Heavy gauge enamelled steel oven bottom. Pressed stainless steel oven inner door with labyrinth seal. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOIO9IO	CI78EFEVI4	Induction Ranges

ITEM

4 zone induction top on fan assisted electric oven

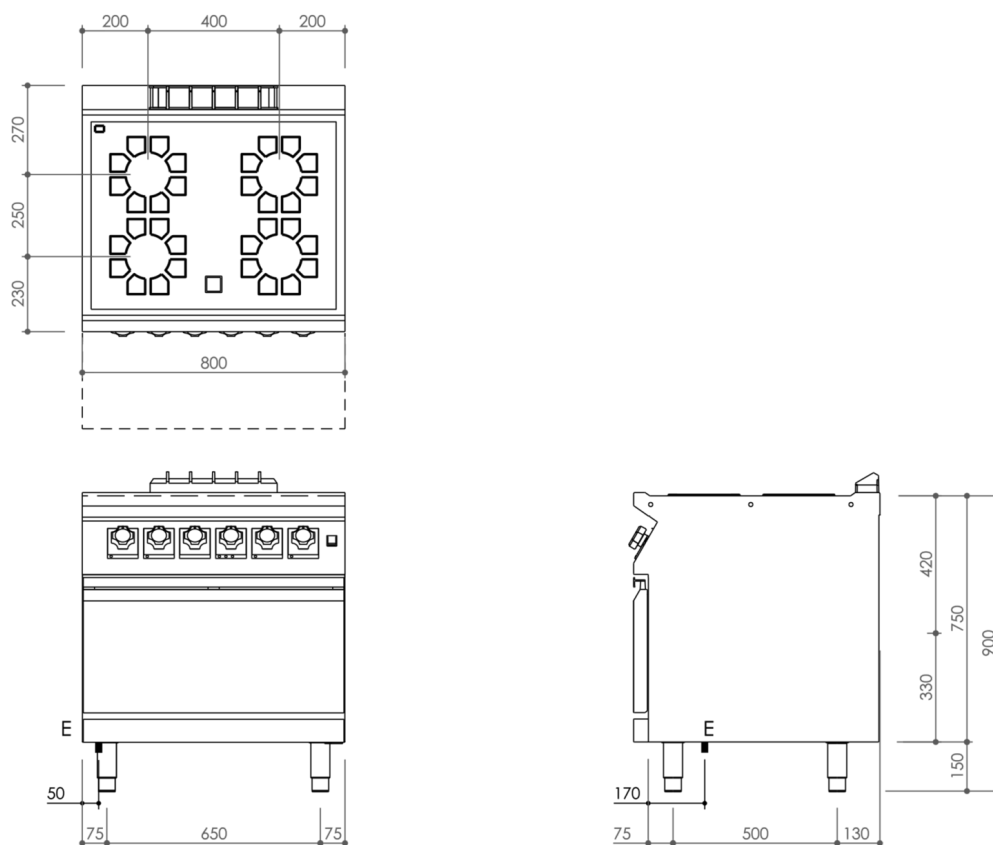

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **VAC400-3 50/60 Hz**

