

RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOO11720	CP78GE	Pasta Cookers

ITEM

Double well electrified gas pasta cooker, 28+28 litre water capacity



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOO11720	CP78GE	Pasta Cookers

ITEM

Double well electrified gas pasta cooker, 28+28 litre water capacity



TECHNICAL SPECIFICATIONS

WIDTH (mm):	800
DEPTH (mm):	750
HEIGHT (mm):	900
WEIGHT (Kg):	83
VOLUME (m ³):	0.8
GAS POWER (kW):	21
EL. POWER (kW):	0.1
VOLTAGE:	VAC230-1
INTERNAL BASE UNIT DIM. (mm):	760x400(h)x700 mm
COOKING ZONES N°:	2
COOKING ZONE DETAILS:	2x 10,5 kW
TANK DIM. (mm):	2x 310x340x275(h) mm
TANK N°:	2
CAPACITY (L):	28+28

DESCRIPTION


Freestanding gas pasta cooker in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge and tank perimeter well with wide expansion zone for foam. Top designed for flush alignment with hermetic seal supplied. Deep drawn tanks in AISI 316 polished stainless steel with radiused bottom for ease of cleaning. Water filling via ball valve with fine flow rate adjustment. Water tap located in zone protected against accidental impact. Heating by means of stabilised flame steel burners with pilot burner and safety thermocouple. Heating control knob shaped to prevent water infiltration. Gas supply controlled by safety valve with thermocouple. Heating control by gas electrified valve with fine and stepless adjustment of output for more effective boiling control. Tank capacity 28+28 litres. Tank dimensions 310x340x275h mm. Water drainage by means of tap located on the front panel. Safety guaranteed by pressure switch that prevents heating if tank is empty. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOO11720	CP78GE	Pasta Cookers

ITEM

Double well electrified gas pasta cooker, 28+28 litre water capacity

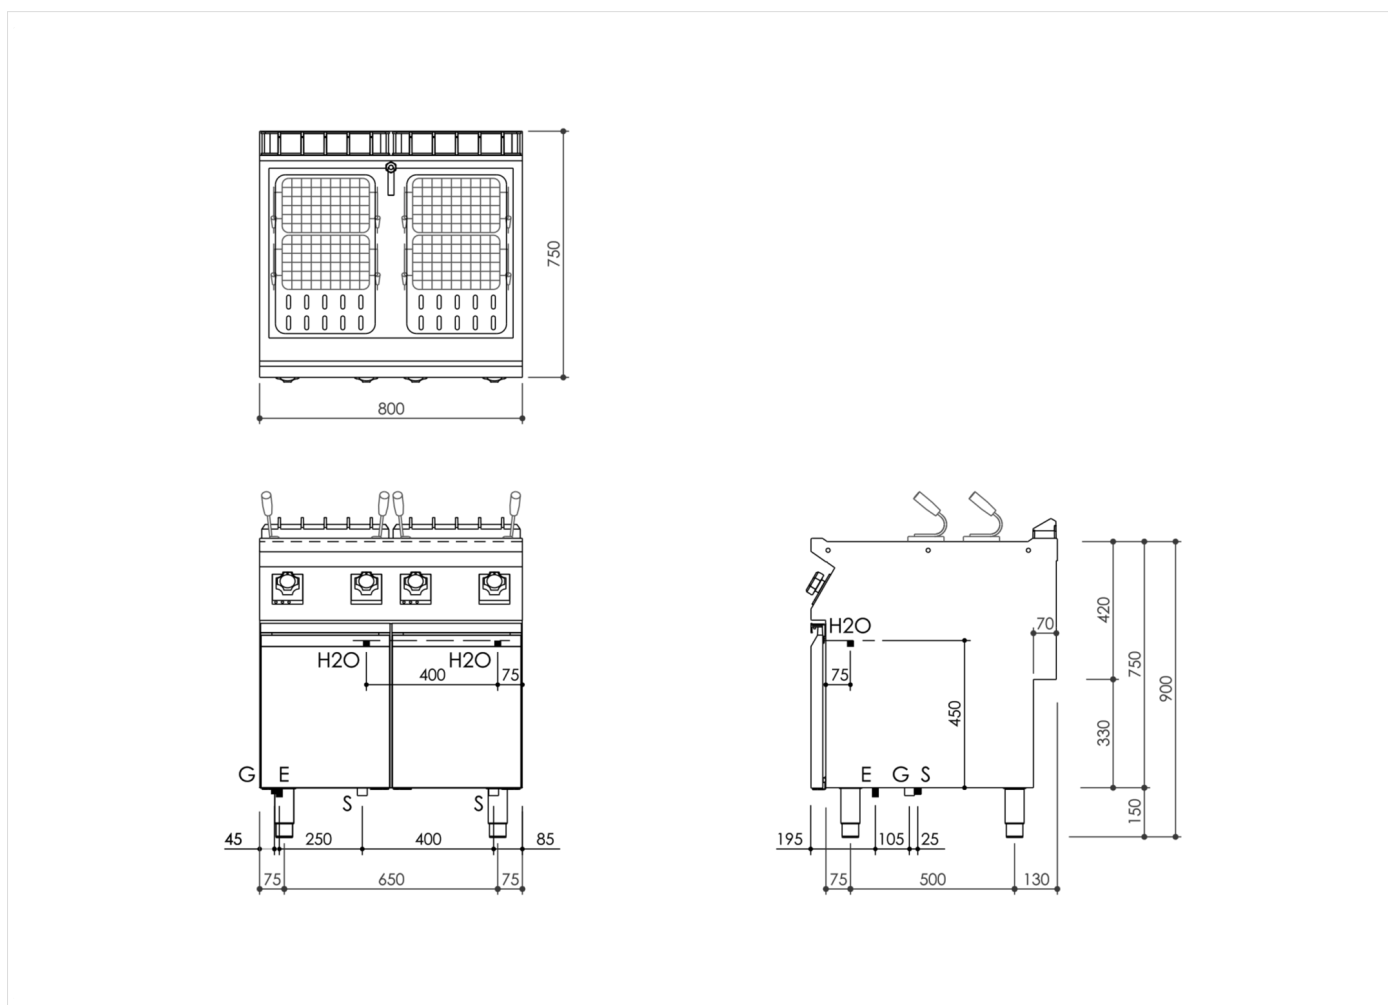

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	VAC230-I 50/60 Hz
(G) Gas Inlet:	Ø1/2"
(AF) Cold Water Inlet:	Ø1/2-H=100mm.

