



|         |             |           |          |
|---------|-------------|-----------|----------|
| RANGE   | CODE        | MODEL     | FUNCTION |
| MI - 90 | MAMCOOO4260 | FT94ERCST | Griddles |

ITEM

**Electric griddle top with ribbed chromed matt plate**



**TECHNICAL SPECIFICATIONS**

|                           |                           |
|---------------------------|---------------------------|
| WIDTH (mm):               | 400                       |
| DEPTH (mm):               | 920                       |
| HEIGHT (mm):              | 250                       |
| WEIGHT (Kg):              | 55                        |
| VOLUME (m <sup>3</sup> ): | 0.25                      |
| EL. POWER (kW):           | 7.5                       |
| VOLTAGE:                  | VAC400-3N                 |
| COOKING ZONES N°:         | 1                         |
| COOKING ZONES DIM. (mm):  | 335x700mm                 |
| COOKING ZONE DETAILS:     | 1x 7.50                   |
| PRODUCT SPECIFICATIONS:   | Ribbed Matt Chromed Plate |
| IP GRADE:                 | IPX5                      |
| TEMP. RANGE (°C):         | 110-280                   |

**DESCRIPTION**


Electric griddle in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with sloping ChromePlus super-tough easy-clean ribbed hotplate with brushed finish. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 40 mm drain hole for fat. Grease collection tub with 1.5 litre capacity. Heating by means of armoured elements in Incoloy. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Cooking temperature thermostatically controlled, with adjustment from 110 to 280 °C. Safety thermostat trips in the event of working thermostat malfunction. Cooking surface 335x700 mm. Scraper supplied for smooth hotplate. The product complies with EC regulation 1935/2004 and Italian ministerial decree 21/03/1973 (Materials and Objects intended to come into contact with Food) MOCA. IPX5 water-resistant rating.



| RANGE   | CODE        | MODEL     | FUNCTION |
|---------|-------------|-----------|----------|
| MI - 90 | MAMCOOO4260 | FT94ERCST | Griddles |

ITEM

**Electric griddle top with ribbed chromed matt plate**

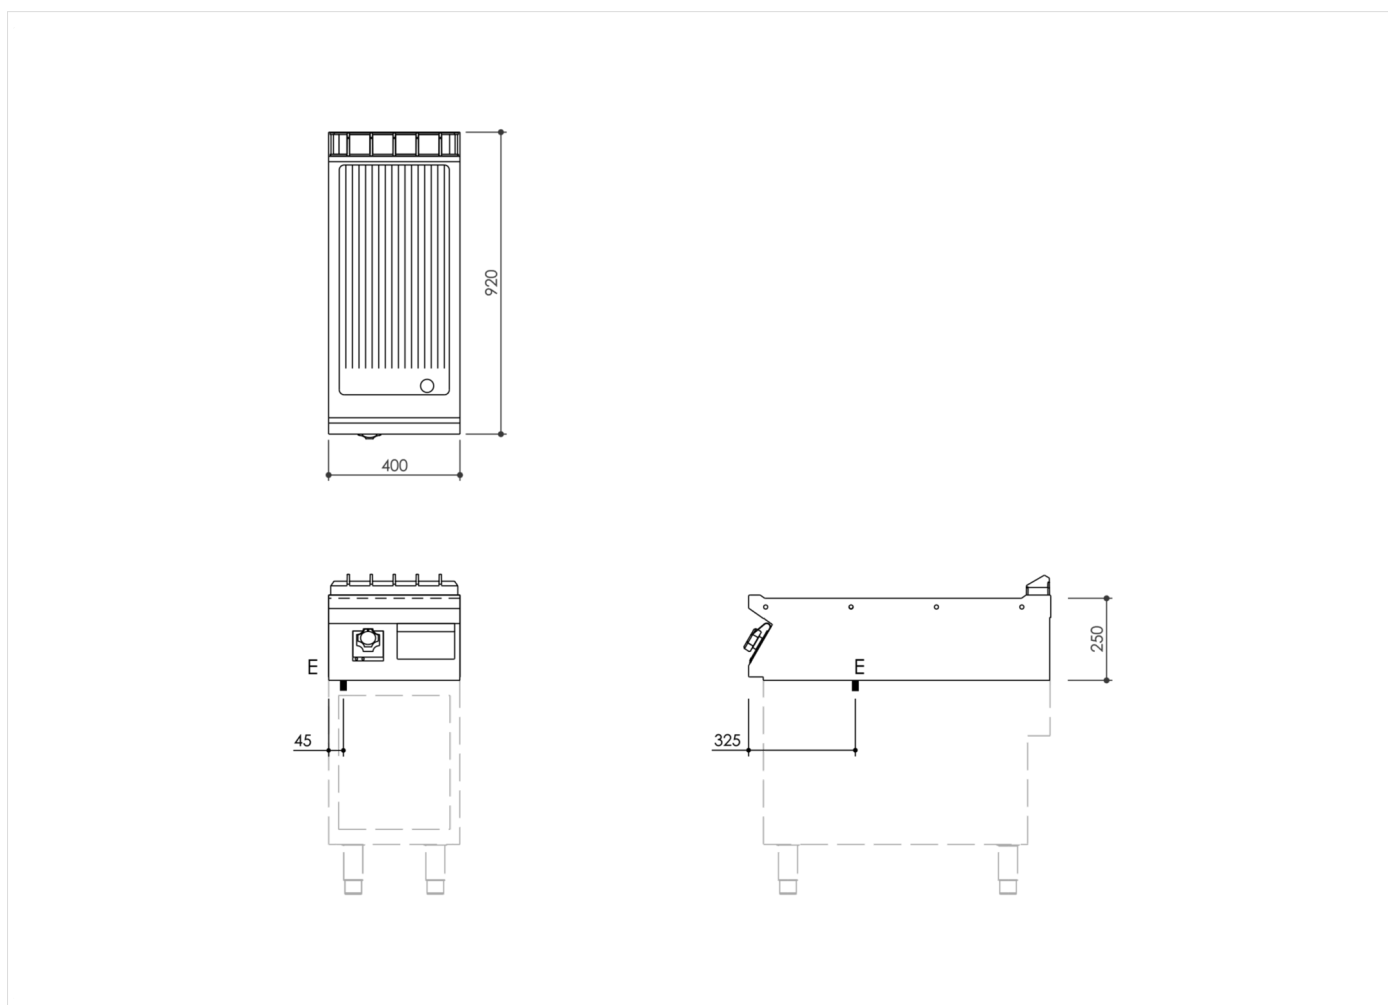

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection: **VAC400-3N 50/60Hz**

