

| RANGE | CODE | MODEL | FUNCTION |
|---------|-------------|-------|---------------|
| MI - 90 | MAMC0005000 | CP98G | Pasta Cookers |

ITEM

Double well gas pasta cooker, 42+42 litre water capacity



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: **30/4/2024**



| RANGE | CODE | MODEL | FUNCTION |
|---------|-------------|-------|---------------|
| MI - 90 | МАМСООО5000 | CP98G | Pasta Cookers |

ITEM

Double well gas pasta cooker, 42+42 litre water capacity



TECHNICAL SPECIFICATIONS WIDTH (mm): 800 DEPTH (mm): 920 HEIGHT (mm): 900 WEIGHT (Ka): 89 VOLUME (m³): ſ GAS POWER (kW): 98 COOKING ZONES N°: 2 305x5l0x285(h)mm TANK DIM. (mm): TANK N°: 9 CAPACITY (L): 2x 42L TEMP. RANGE (°C): 0-100

DESCRIPTION

Freestanding gas pasta cooker in AISI 3O4 stainless steel. 20/IO pressed steel top with anti-spill front edge and tank perimeter well with wide expansion zone for foam. Top designed for flush alignment with hermetic seal supplied. Deep drawn tanks in AISI 3I6 polished stainless steel with radiused bottom for ease of cleaning. Water filling via ball valve with fine flow rate adjustment. Water tap located in zone protected against accidental impact. Heating by means of stabilised flame steel burners with pilot burner and safety thermocouple. Heating control knob shaped to prevent water infiltration. Gas supply controlled by safety valve with thermocouple. Automatic pilot burner ignition by piezoelectric device. Heating control by gas valve with fine and stepless adjustment of output for more effective boiling control. Tank capacity 42+42 litres. Tank dimensions: 305x5IOx285h mm. Water drainage by means of accessible tap located in lower cabinet. Safety guaranteed by pressure switch that prevents heating if tank is empty. Appliance equipped with stainless steel adjustable feet.




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: **30/4/2024**



| MI - 90 | MAMC0005000 | CP98G | Pasta Cookers |
|---------|-------------|-------|---------------|
| RANGE | CODE | MODEL | FUNCTION |

ITEM

Double well gas pasta cooker, 42+42 litre water capacity

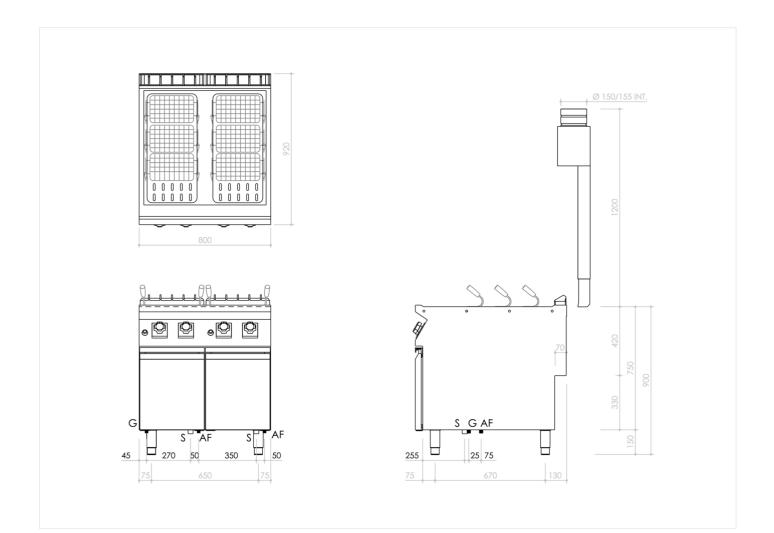

INSTALLATION SPECIFICATIONS

| (G) Gas Inlet: | Ø1/2" |
|------------------------|---------------|
| (AF) Cold Water Inlet: | Ø3/4-H=IOOmm. |
| (S) Output Drain: | ØI" |



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: **30/4/2024**